

SPECIFICATION

Current Rating:1.8A

Dielectric Withstand Voltage:100V AC

Voltage Rating:30V AC

Contact Resistance:30 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.


Operation Temperature:-20°C~+85°C

Insertion Force:35N Max.

Extraction Force:8N Min.

⚠ Durability:10000 Cycles

RoHS Compliant

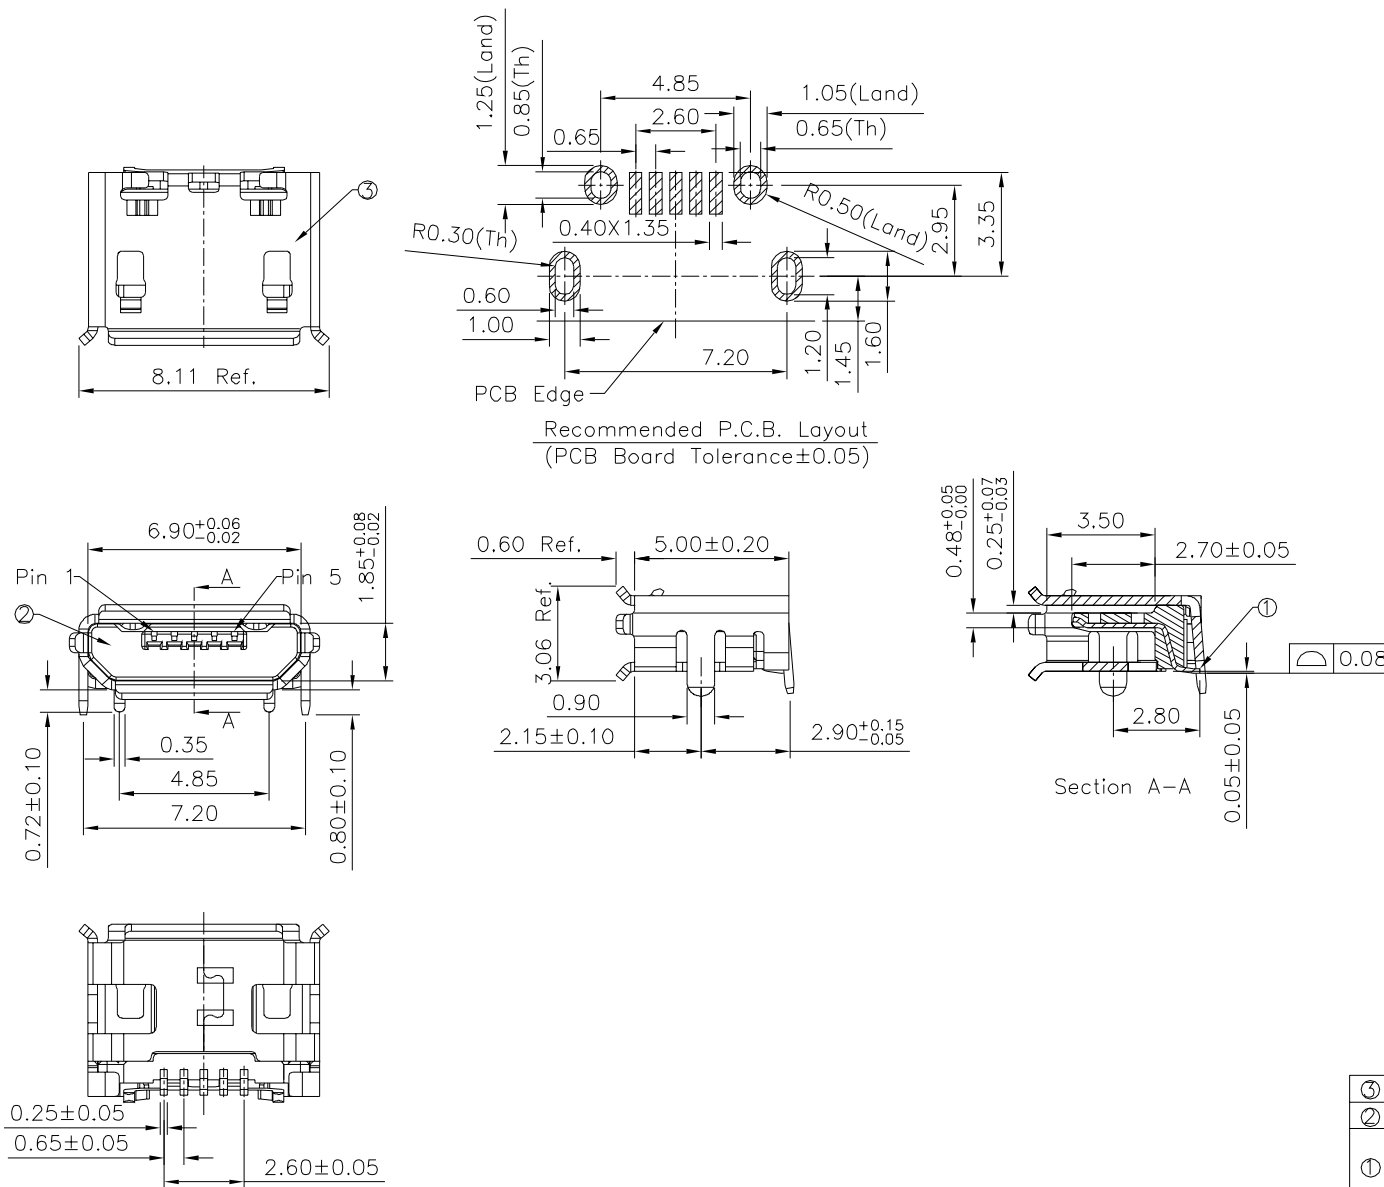

③	Shell	1	Stainless Steel	Nickel Plated
②	Insertmolding	1	LCP+30%G.F.	UL94V-0,Black
①	Terminal A	5	Brass	Gold Flash Over All, Over Nickel
No.	Description	Q'ty	Material	Remark

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 21022

21022

SCALE

NONE

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES AREX. ±0.38 X.* ±4*
.X ±0.25 .X* ±2*
.XX ±0.20
.XXX ±0.10UNIT
mm

②	B2	Modify Data	HZF	06/29/2020
①	B1	Modify Data	HZF	05/21/2020
①	B0	Modify Data	HZF	05/28/2018
①	B0	NEW RELEASE	HZF	05/28/2018
NO.	REV.	REVISIONS	CHK	DATE