

File No.	6890G08801	SHEET	1/1

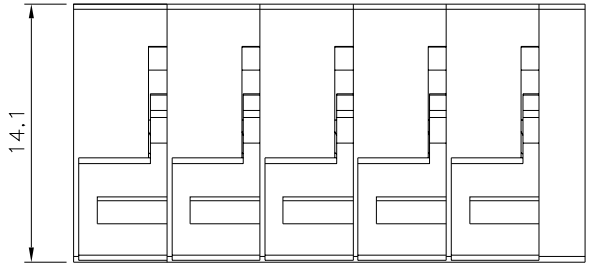


△1

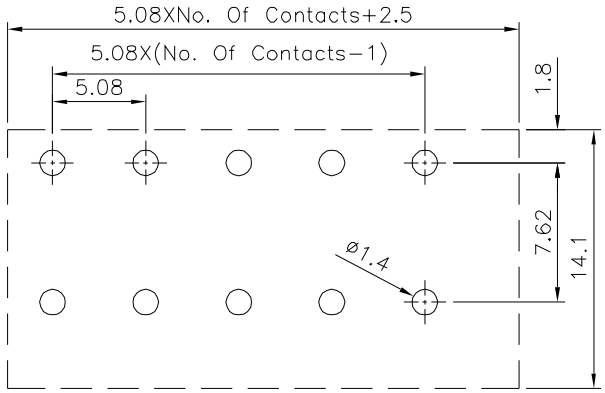


△1 Recommended P.C.B. Layout

△2△1 SPECIFICATION

Current Rating:10A/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60s/1 PCS
Contact Resistance:20 Milliohms Max.
Wire Range:14~22 AWG
Operating Temperature:−40°C~+105°C
Contact:Copper Alloy,Tin Plated
Wire Guard:Stainless Steel
Insulator Body:Polyamide+G.F.(UL94V−0),Green
RoHS Compliant

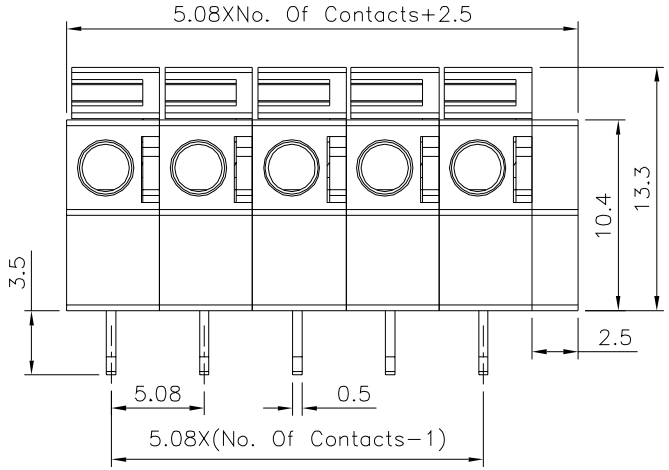

△1

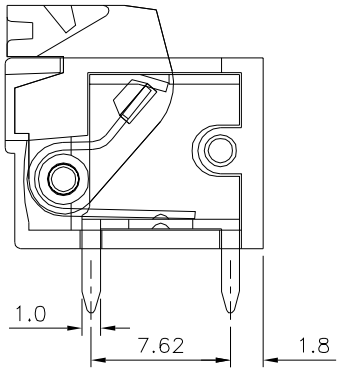

△1

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △1	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
21035	CHECKED BY HZF	
	DRAWING BY GAO	
SCALE NONE	REV. A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	07/08/2024
△1	A1	Modify Data	HZF	07/03/2013
△0	A0	NEW RELEASE	HZF	02/10/2010