




Recommended P.C.B. Layout



1X2P~1X36P




1X37P, 1X38P, 1X39P




1X40P

△ SPECIFICATION


Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Operation Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

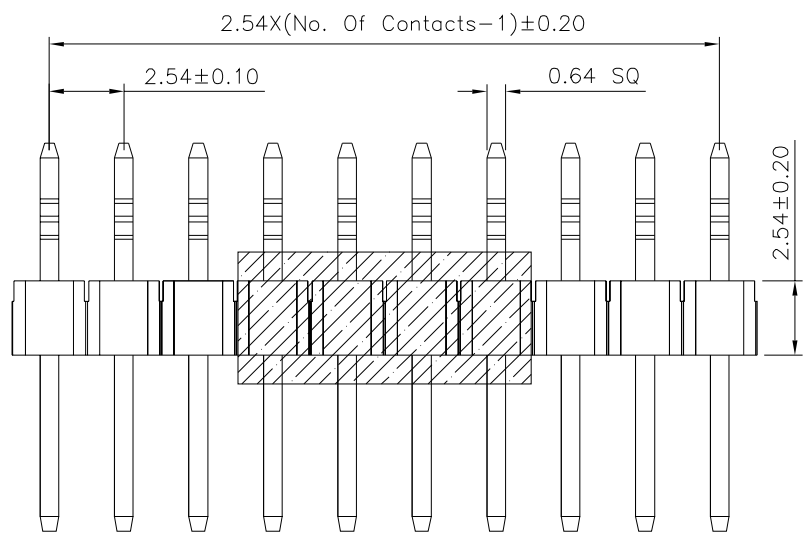

△

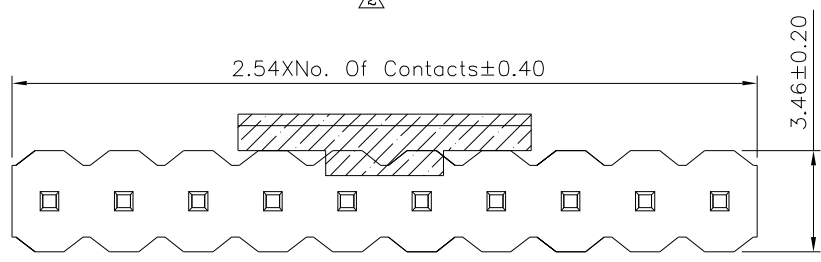

△

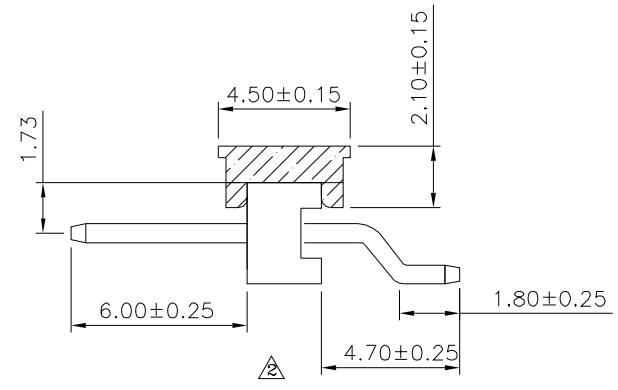

△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △
21117

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP
SCALE NONE
REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
△.X ±0.38
.XX ±0.25
.XXX ±0.05
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	11/01/2019
△1	A1	Modify Data	HZF	08/28/2014
△0	A0	NEW RELEASE	HZF	04/09/2012