
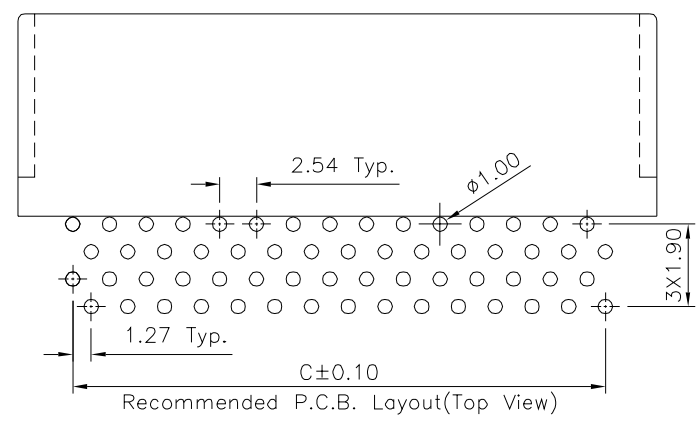
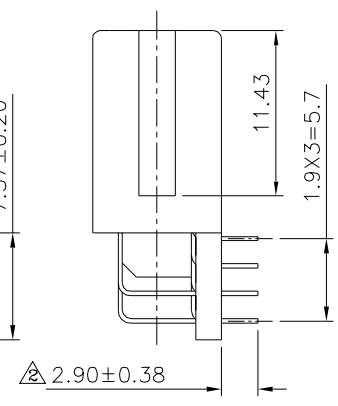
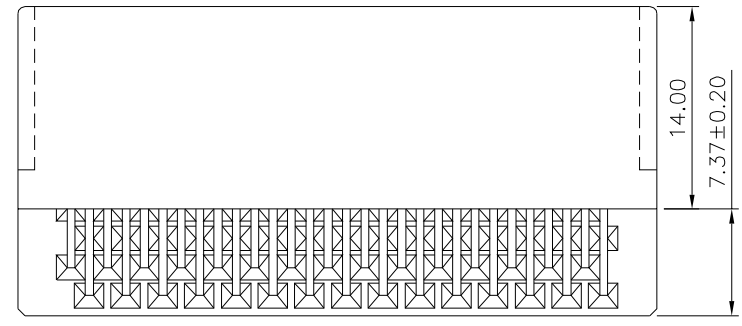
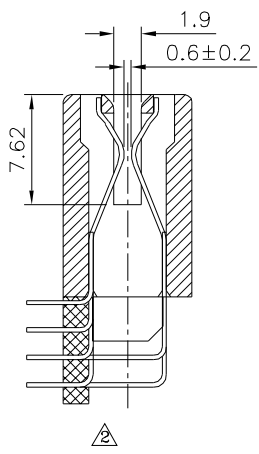


**△ SPECIFICATION**  
 Current Rating: 1 Amp  
 Voltage Rating: 250V AC RMS  
 Dielectric Withstanding Voltage: 500V AC RMS 60Hz  
 For 1 Minute  
 Contact Resistance: 30 Milliohms Max. At 1 Amp DC  
 Insulation Resistance: 1000 Megohms Min. At 500V DC  
 Temperature Range: -55°C ~ +85°C  
 Insulator: PA66+G.F.  
 Contact: Brass  
 Gold Flash On Contact Area, Tin Plated  
 On Solder Tails, Over Nickel  
 RoHS Compliant

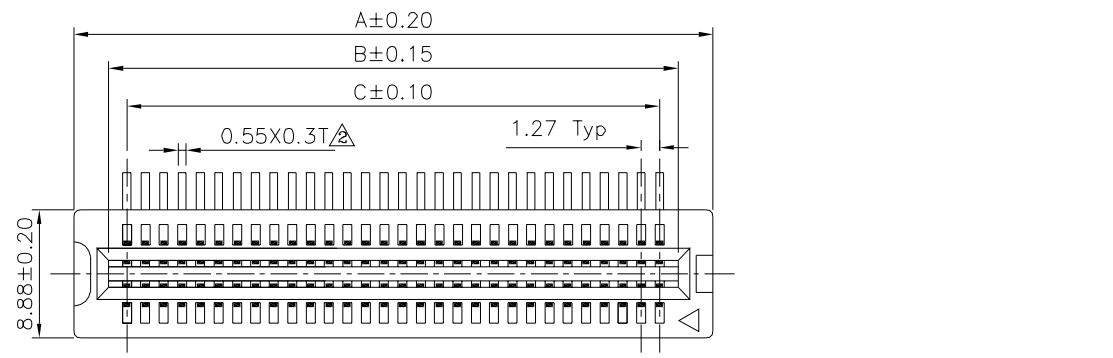


Pin	A	B	C	Pin	A	B	C
04	8.64	3.81	1.27	32	26.42	21.59	19.05
06	9.91	5.08	2.54	34	27.69	22.86	20.32
08	11.18	6.35	3.81	36	28.96	24.13	21.59
*10	12.45	7.62	5.08	38	30.23	25.40	22.86
12	13.72	8.89	6.35	42	32.77	27.94	25.40
14	14.99	10.16	7.62	44	34.04	29.21	26.67
16	16.26	11.43	8.89	46	35.31	30.48	27.94
18	17.53	12.70	10.16	48	36.58	31.75	29.21
*20	18.80	13.97	11.43	52	39.12	34.29	31.75
*22	20.07	15.24	12.70	54	40.39	35.56	33.02
*24	21.34	16.51	13.97	56	41.66	36.83	34.29
26	22.61	17.78	15.24	58	42.93	38.10	35.56
28	23.88	19.05	16.51	100	69.60	64.77	62.23
*30	25.15	20.32	17.78	*120	82.30	77.47	74.93


The Mark Of "\*" Are Tooled Ready

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.


DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.20 .X ±0.15 .XX ±0.10 .XXX ±0.05	△ B4	Modify Data	HZF	09/23/2022
21195		MEI			△ B3	Modify Data	HZF	01/30/2019
		CHECKED BY			△ B2	Modify Data	HZF	01/17/2019
SCALE NONE		DRAWING BY			△ B1	Modify Data	HZF	11/07/2015
		CYP		△ B0	NEW RELEASE	HZF	09/08/2014	
REV.	B4	UNIT	mm	NO. REV.	REVISIONS		CHK	DATE

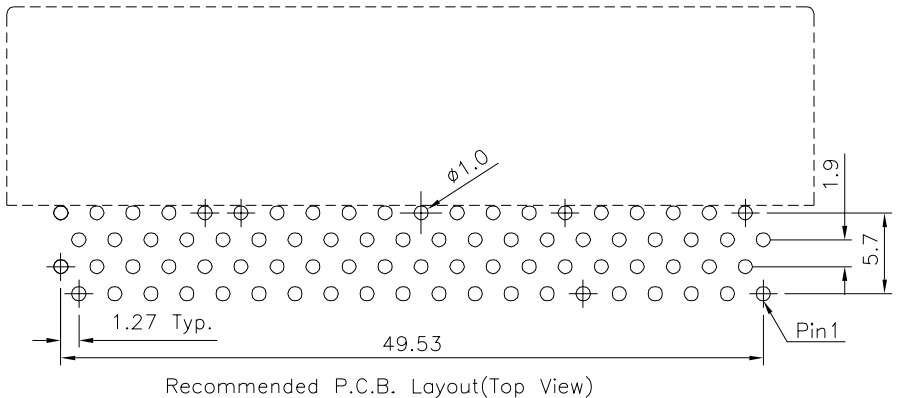




Recommended P.C.B. Layout (Top View)

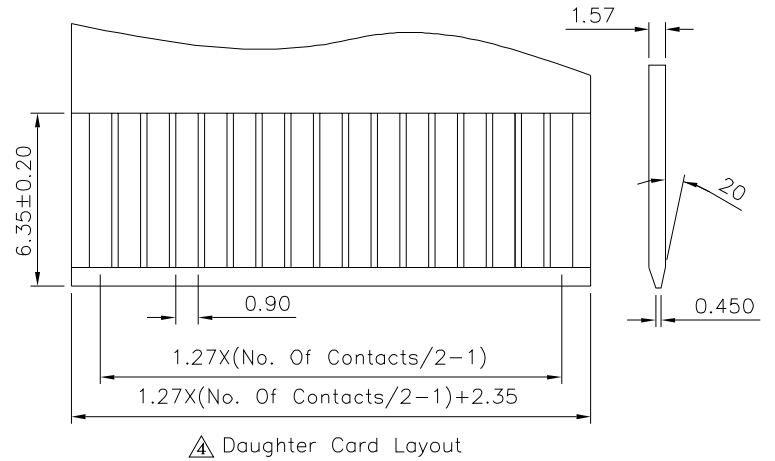

Daughter Card Layout

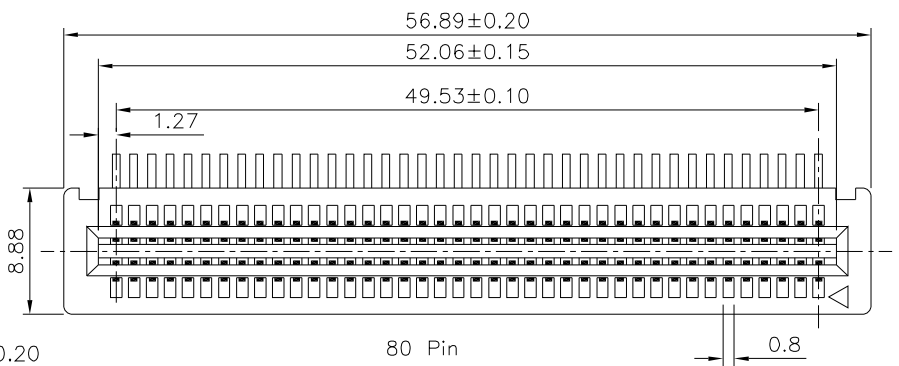

80 Pin

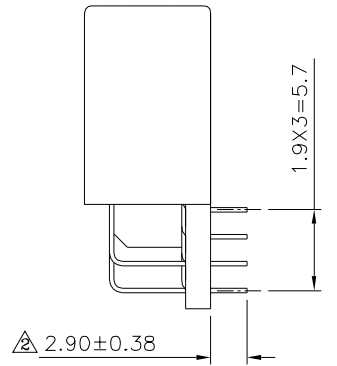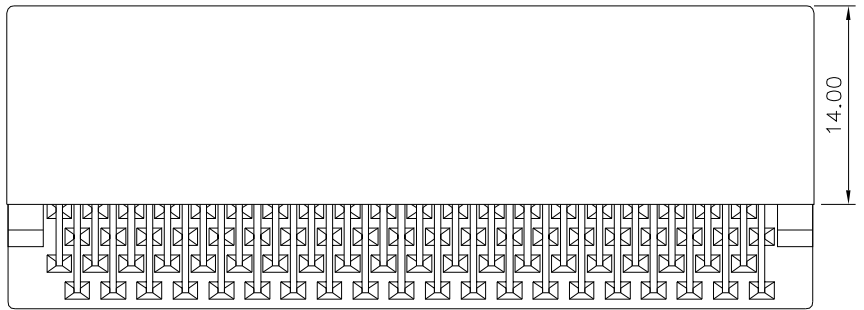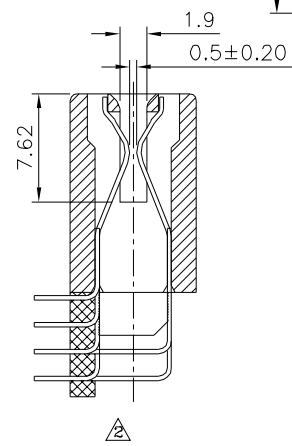






**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 21195  
SCALE NONE

APPROVED BY MEI  
CHECKED BY HZF  
DRAWING BY CYP  
REV. B4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
0~10  $\pm 0.20$   
10~30  $\pm 0.30$   
30~100  $\pm 0.40$   
100~300  $\pm 0.50$   
ANG.  $\pm 0.5^\circ$   
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△4	B4	Modify Data	HZF	09/23/2022
△3	B3	Modify Data	HZF	01/30/2019
△2	B2	Modify Data	HZF	01/17/2019
△1	B1	Modify Data	HZF	11/07/2015
△0	B0	NEW RELEASE	HZF	09/08/2014

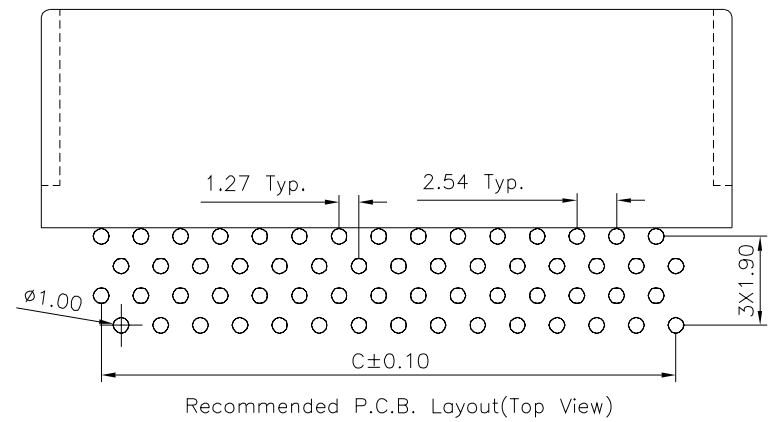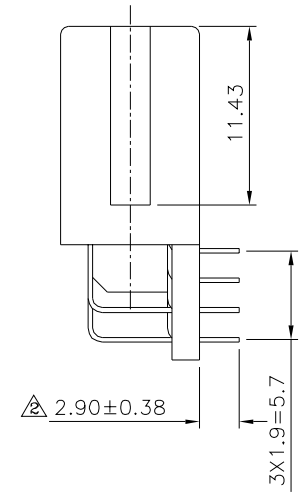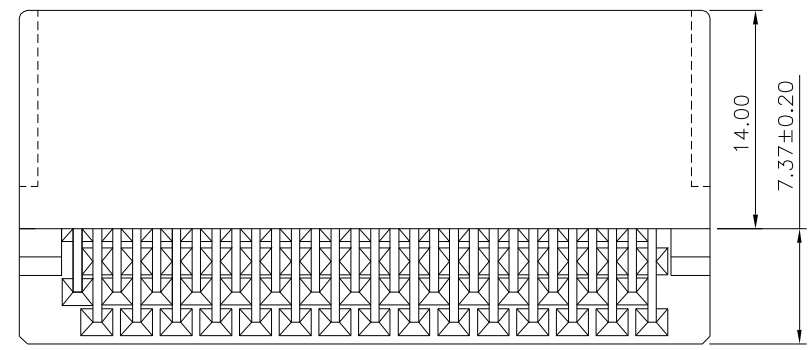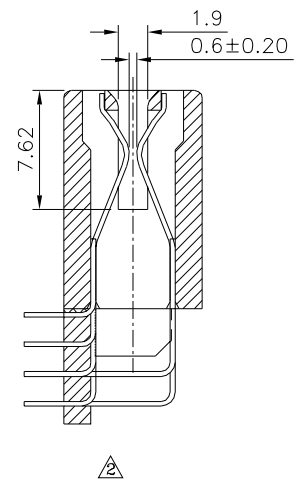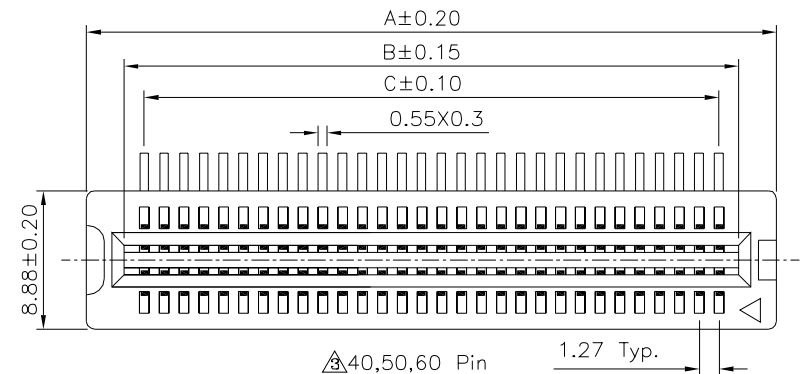

Pin	A	B	C
40	31.50	26.67	24.13
50	37.85	33.02	30.48
60	44.20	39.37	36.83

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 21195

APPROVED BY MEI  
CHECKED BY HZF  
DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
.X ±0.20  
.XX ±0.15  
.XX ±0.10  
.XXX ±0.05

NO.	REV.	REVISIONS	CHK	DATE
B4		Modify Data	HZF	09/23/2022
B3		Modify Data	HZF	01/30/2019
B2		Modify Data	HZF	01/17/2019
B1		Modify Data	HZF	11/07/2015
B0		NEW RELEASE	HZF	09/08/2014

SCALE NONE REV. B4

UNIT mm

NO. REV. REVISIONS CHK DATE