
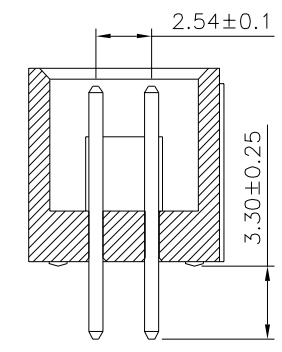
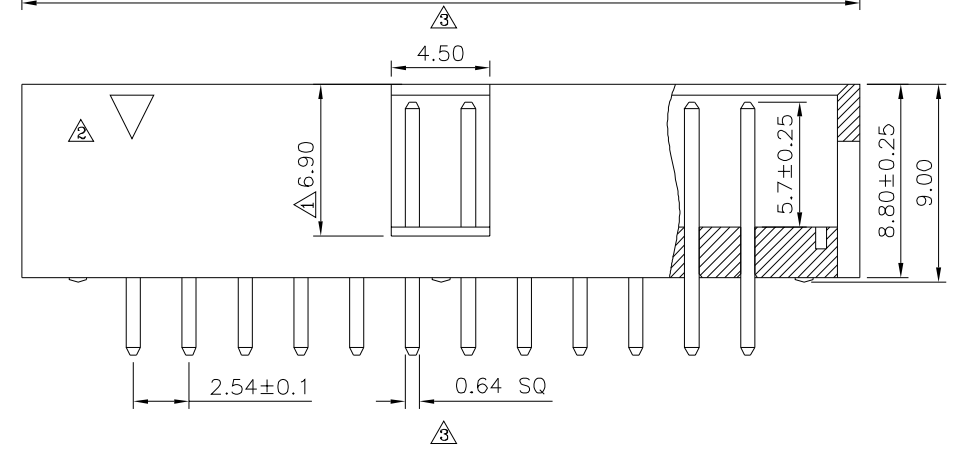


Recommended P.C.B. Layout  
Tolerance: ±0.05 (Top View)

**SPECIFICATION**  
 Current Rating: 3 Amp  
 Withstand Voltage: 1000V AC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C ~ +105°C  
 Insulator: PBT(UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

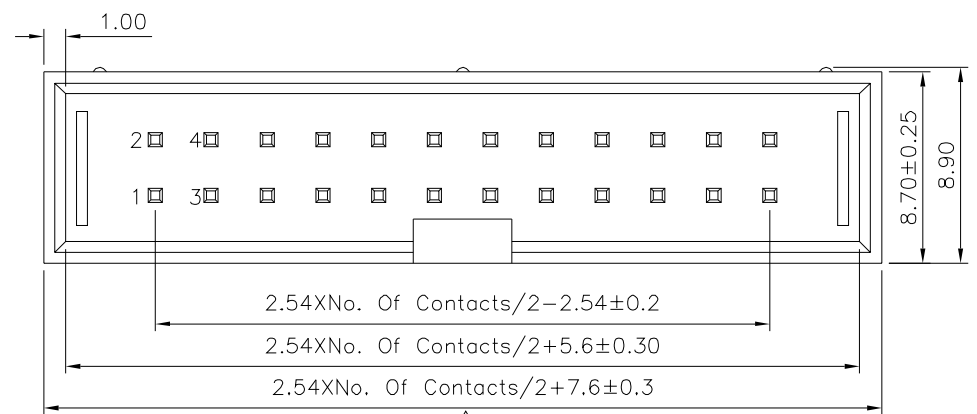

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. <b>21244</b>		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X: ±0.25 X*: ±2" △ XX: ±0.20 X*: ±1.5" △ XXX: ±0.15 X*: ±1.0" △ XXXX: ±0.1 XXX*: ±0.5"
		CHECKED BY HZF		
		DRAWING BY HAO		
SCALE	NONE	REV.	A4	UNIT mm

△ A4	Modify Data	HZF	01/10/2023
△ A3	Modify Data	HZF	04/17/2015
△ A2	Modify Data	HZF	11/20/2013
△ A1	Modify Data	HZF	09/03/2013
△ A0	NEW RELEASE	HZF	12/14/2010
NO. REV.	REVISIONS	CHK	DATE