
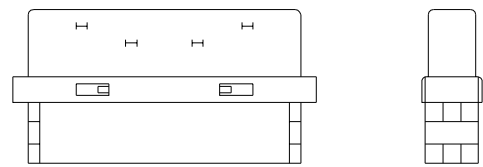


Termination Cover(2 PCS)



SPECIFICATION

Current Rating:0.5 Amp
 Dielectric Withstanding Voltage:250V AC
 Insulation Resistance:>500 Megaohms Min.
 Contact Resistance:35 Milliohms Max.
 Operation Temperature:-55°C To +85°C
 Housing And Cover:PBT+G.F(UL94V-0),Black
 Contact:Phosphor Bronze,Selective Gold Plated
 30u" Over Nickel
 Back Shell:Zinc Alloy,Nickel Plated Over Copper
 Shell:Steel,Nickel Plated Over Copper
 Jackscrews:Steel,Nickel Plated Over Copper
 Cable Clipper:Steel,Nickel Plated Over Copper
 Flat Screws:Steel,Nickel Plated Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
21268		MEI		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	09/05/2017