


SPECIFICATION

Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:500V AC At Sea Level
 Mate Force:3.75Kgf Max.
 Unmate Forec:1.02Kgf Min.
 Life Test:1500 Cycles
 Working Temperature:-55°C~+85°C
 RoHS Compliant

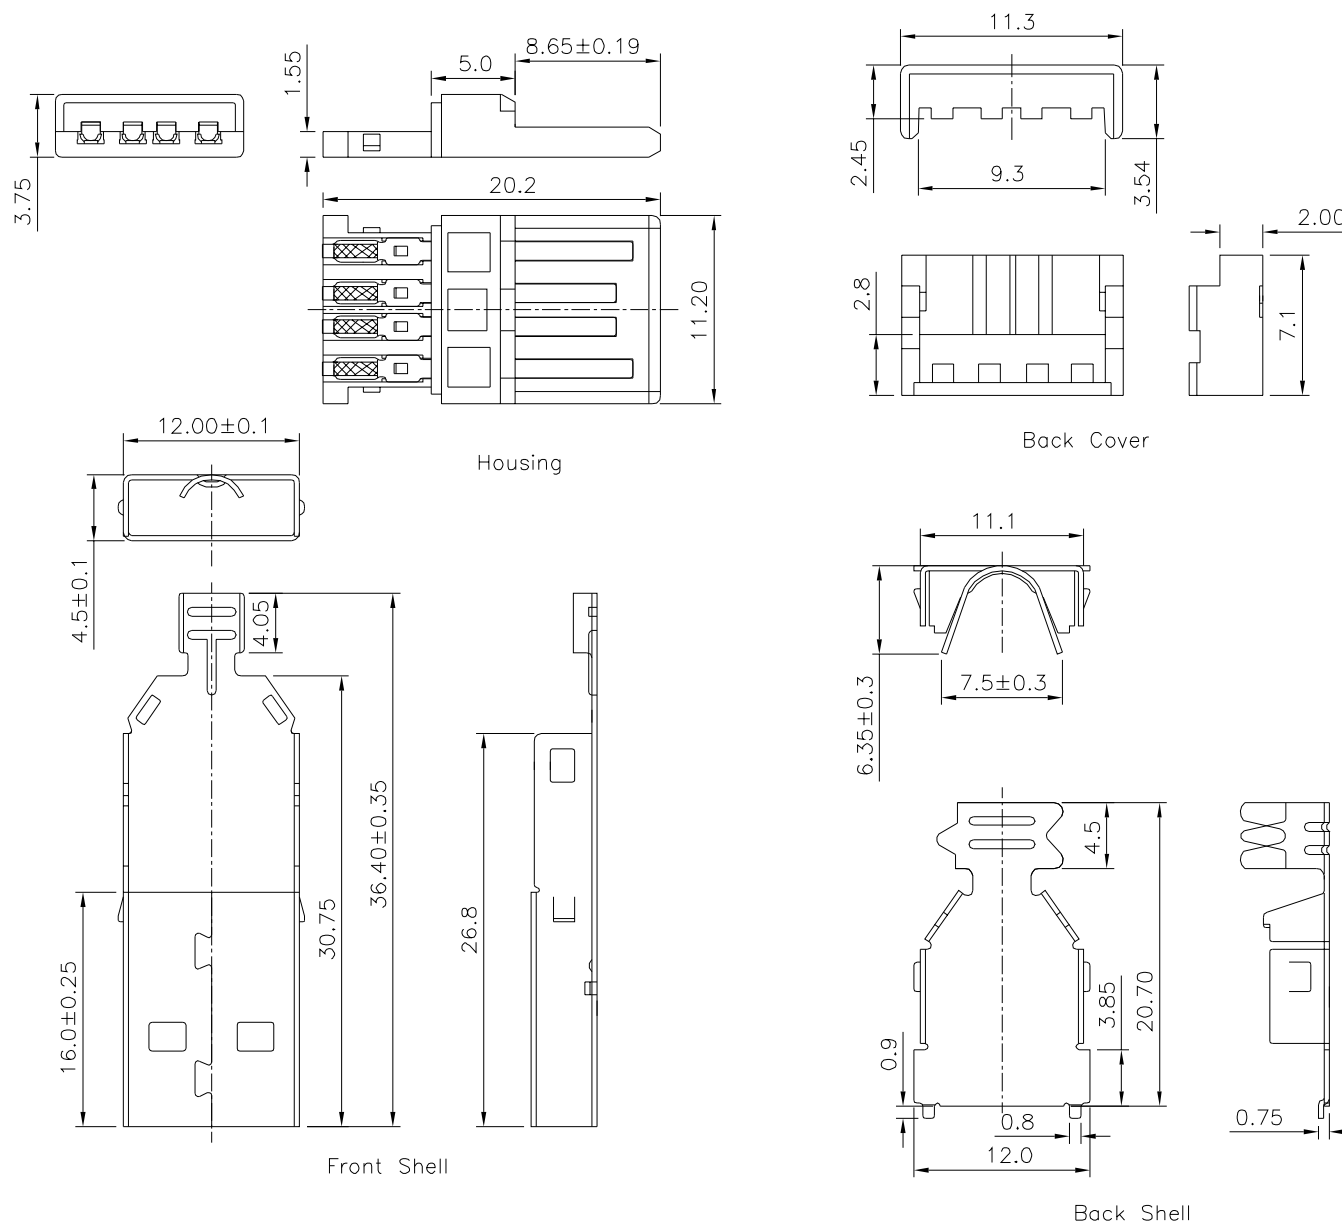

⑤	Back Shell	1	Steel	Nickel Plated
④	Front Shell	1	Steel	Nickel Plated
③	Contact	4	Brass	Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
②	Back Cover	1	PBT	White
①	Housing	1	PBT	White
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 21353

21353

SCALE NONE

REV. A1

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.35 X.* ±5.0°
 .X ±0.25 .X* ±4.0°
 .XX ±0.20 .XX* ±3.0°
 .XXX ±0.15 .XXX* ±2.0°

UNIT mm



① A1 Modify Data HZF 05/13/2021

② A0 NEW RELEASE HZF 12/08/2017

NO. REV. REVISIONS CHK DATE