

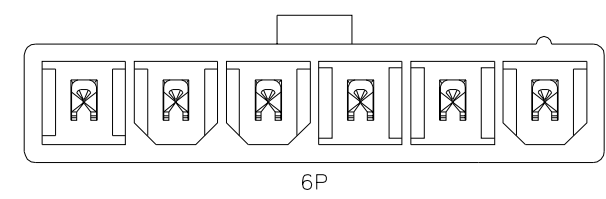
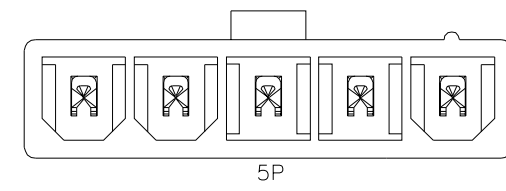
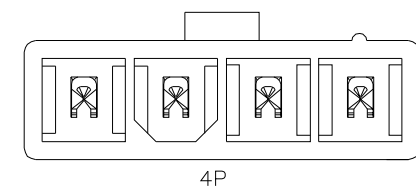


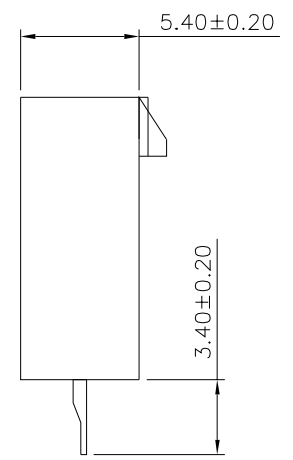


**SPECIFICATION**  
 Current Rating:7A AC,DC  
 Voltage Rating:600V AC,DC  
 Withstanding Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megohms Min.  
 Contact Resistance:10 Milliohms Max.  
 Operation Temperature:-25°C~+85°C  
 Insulator:PA66,UL94V-2,Nature Color  
 Contact:Brass,Tin Plated Over Nickel  
 RoHS Compliant

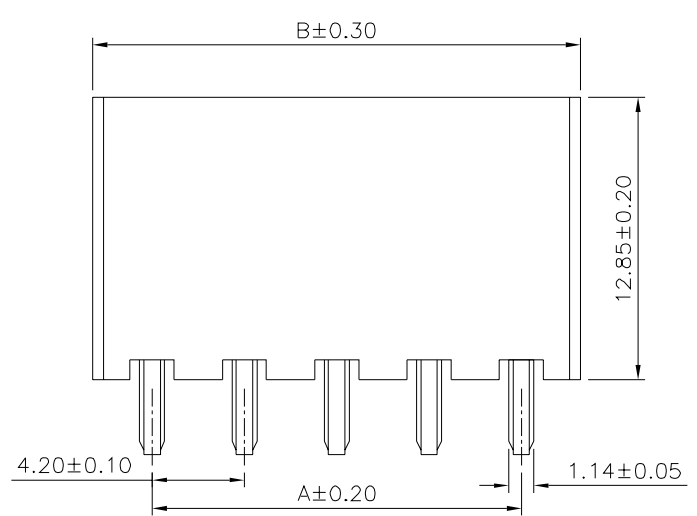

Recommended P.C.B. Layout

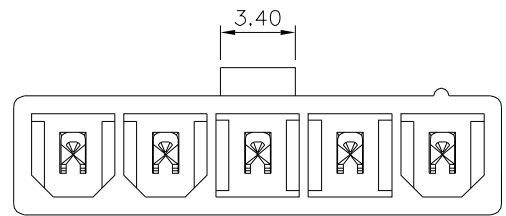

Pin	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
21441		EMILY		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		CYP		
REV.	A0	NO. REV.		△ A0
		REVISIONS		NEW RELEASE
		CHK		HZF
		DATE		08/03/2014
