

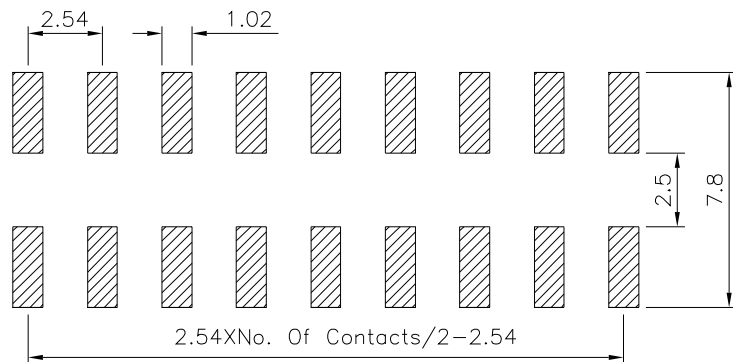
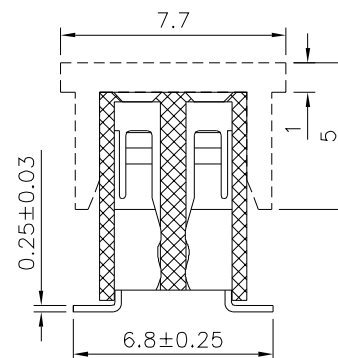


SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V-O),Black
RoHS Compliant

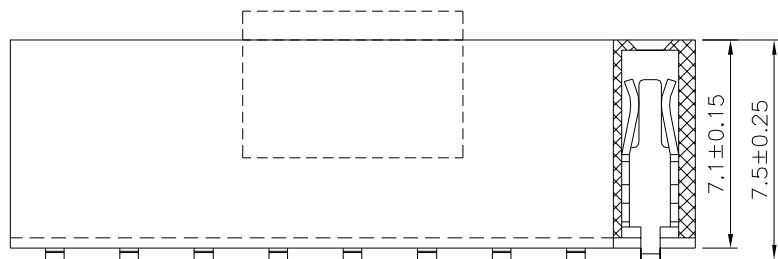

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

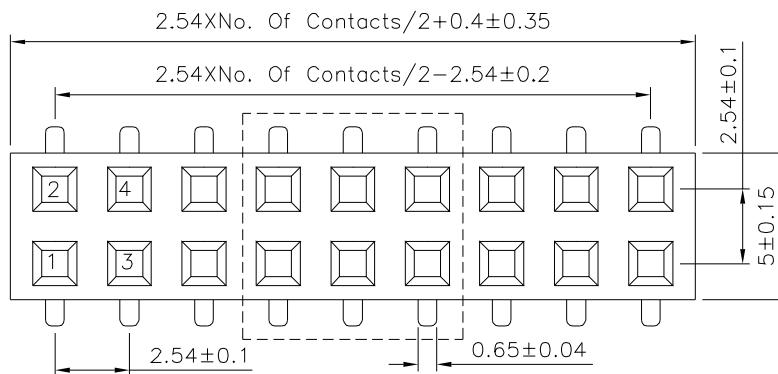

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21482

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.° ±2°
.X ±0.20 .X° ±1.5°
.XX ±0.15 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

HZF

07/27/2017