



**SPECIFICATION**

Contact Resistance:5 Ohms Max.  
 Insulation Resistance:20 Megaohms Min.  
 100% Open/Short Test  
 DC Test 300V/10ms  
 RoHS Compliant

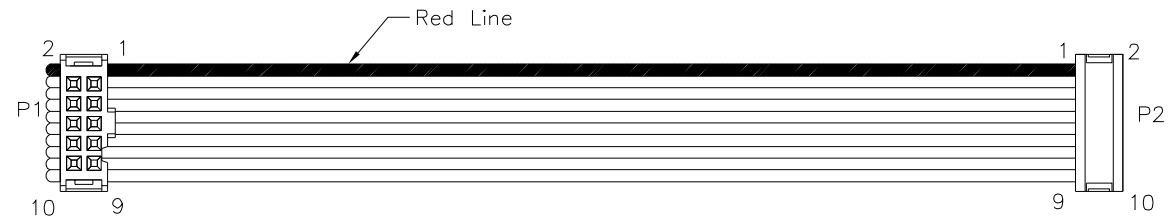

Pin Assignment	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10

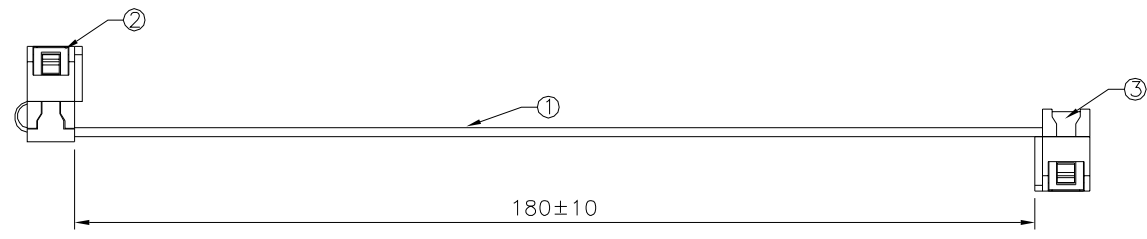

No.	Name	Q'ty	Description
①	Wire	---	UL2651 28AWG,PH1.27mm 10P Gray Flat Cable With Red Side
②	Connector	1 PCS	PH2.54 IDC Socket With SR,10Pin,Black
③	Connector	1 PCS	PH2.54 IDC Socket Without SR,10Pin,Black

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  .X ±0.5 ANG. ±0.5°				
21493		MEI						
		CHECKED BY						
		HZF						
		DRAWING BY						
		CYP						
SCALE	NONE	REV.	A0	UNIT mm	△ A0	NEW RELEASE	HZF	11/23/2018
				NO.REV.	REVISIONS	CHK	DATE	