

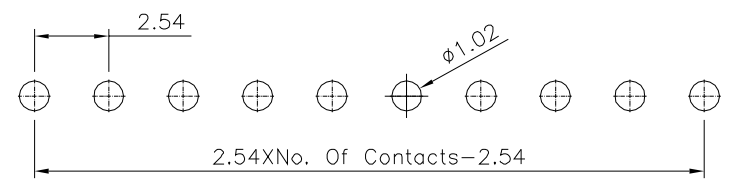
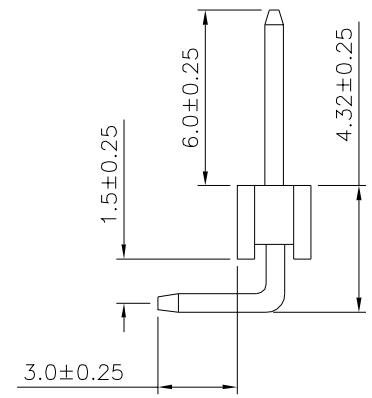


SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operating Temperature:-40°C~+105°C
 Housing:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

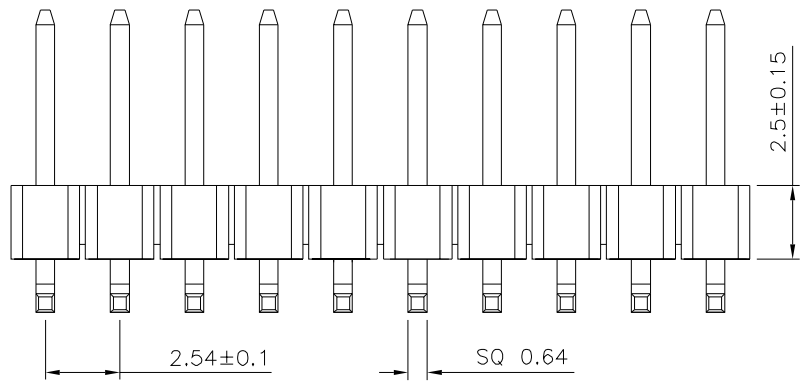

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

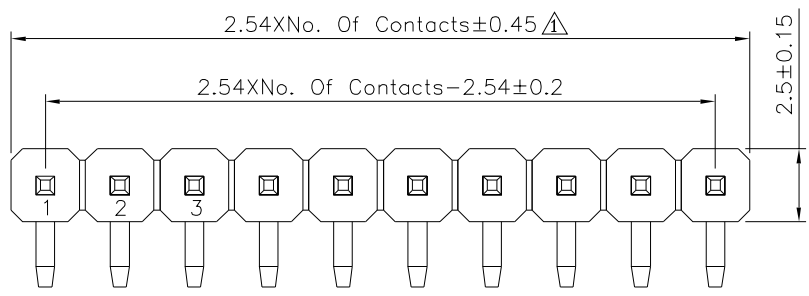

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X. ±2° .X ±0.20 .X ±1.5° .XX ±0.15 .XX ±1° .XXX ±0.10 .XXX ±0.5°
21558		MEI		
		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		
REV.	A2	UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data.	HZF	04/11/2023
△1	A1	Modify Data.	HZF	12/19/2016
△0	A0	NEW RELEASE	HZF	11/22/2014