
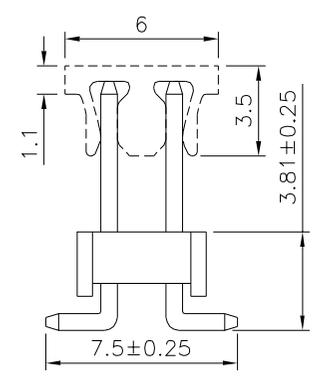
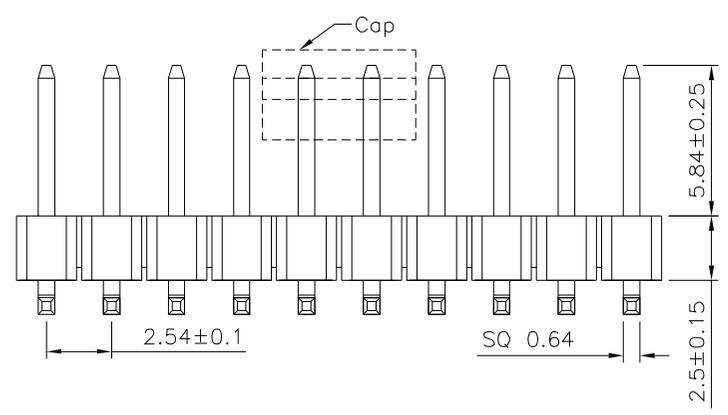


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

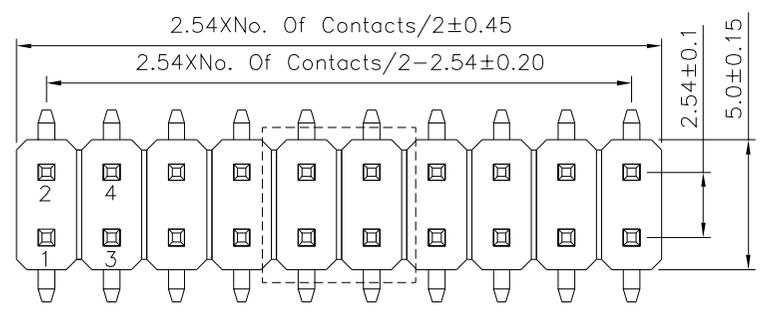

SPECIFICATION
 Current Rating: 3A
 Withstand Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Operation Temperature: -40°C ~ +105°C
 ⚠ Insulator: PA9T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 21695

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 SCALE NONE REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X ± 0.25 X* ± 2°
 .X ± 0.20 .X* ± 1.5°
 .XX ± 0.15 .XX* ± 1°
 .XXX ± 0.10 .XXX* ± 0.5°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A1	Modify Data	HZF	11/15/2023
⚠	A0	NEW RELEASE	HZF	01/03/2018