



△ SPECIFICATION


Current Rating:1.5A AC/DC
 Voltage Rating:50V AC/DC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 △ Temperature Range:-40°C~+105°C
 △ Insulator:PA9T(UL94V-0),Beige
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Fitting Nail:Brass,Tin Plated
 RoHS Compliant

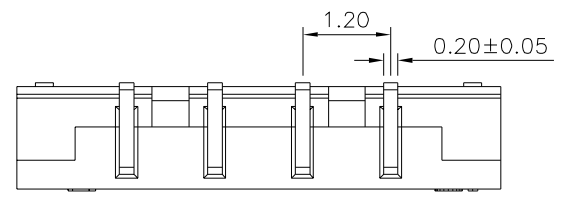


△

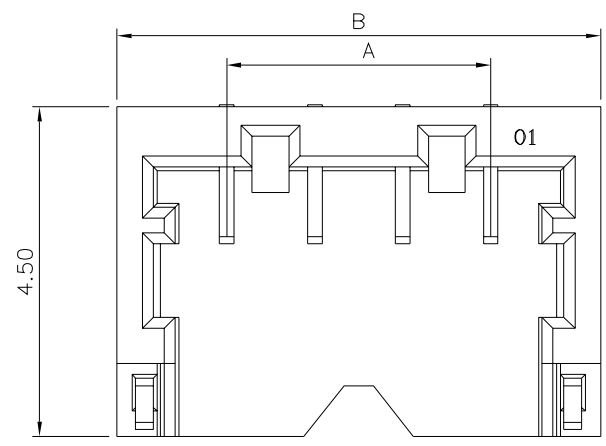


△

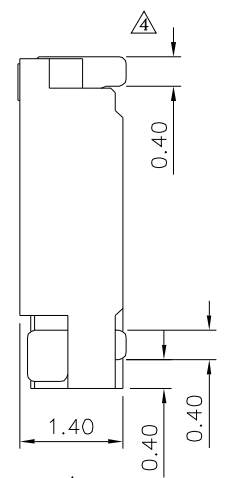

△

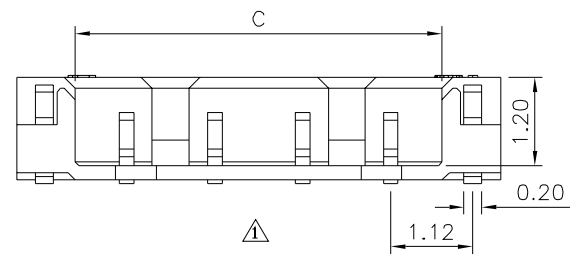

△

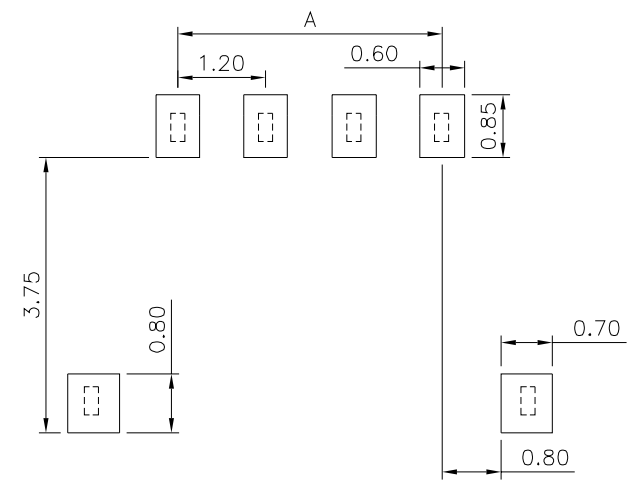

△ Recommended P.C.B. Layout

Pin	A	B	C
02	1.20	4.30	2.64
03	2.40	5.50	3.84
04	3.60	6.70	5.04
05	4.80	7.90	6.24
06	6.00	9.10	7.44
07	7.20	10.30	8.64

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△
 21721

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20 △
 .XXX ±0.10
 X. ±2° △

NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	08/11/2021
△	A3	Modify Data	HZF	10/30/2019
△	A2	Modify Data	HZF	09/19/2019
△	A1	Modify Data	HZF	03/03/2016
△	A0	NEW RELEASE	HZF	06/19/2014

SCALE NONE

REV. A4

UNIT mm

NO. REV. REVISIONS CHK DATE