

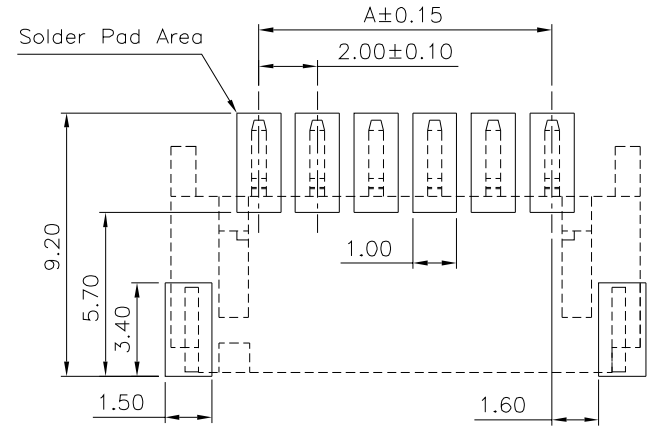
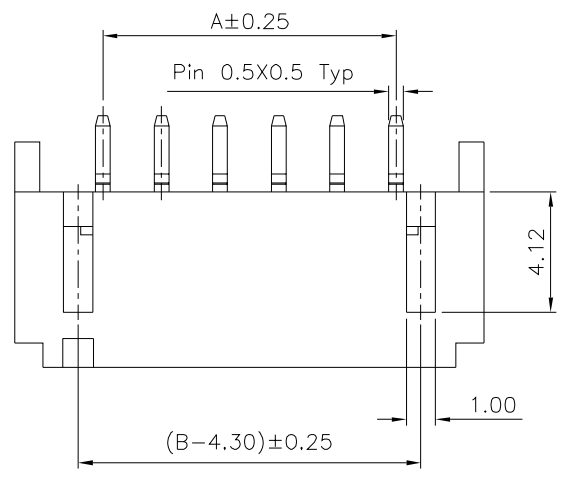



△ SPECIFICATION

Current Rating:2A AC/DC  
 Voltage Rating:100V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Withstanding Voltage:800V AC/Minute  
 Temperature Range:-25°C~+85°C  
 Insulator:PA9T(UL94V-0),Nature  
 Pin:Brass,Tin Plated Over Nickel  
 Latch:Brass,Tin Plated Over Nickel  
 RoHS Compliant

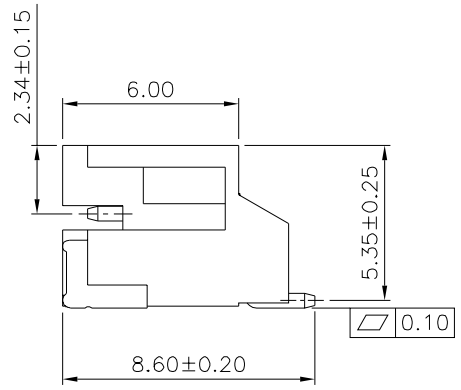

Recommended P.C.B Layout (Top Side)  
 P.C.B Thickness = 1.20 ~ 1.60mm (Tolerance =  $\pm 0.05$ )

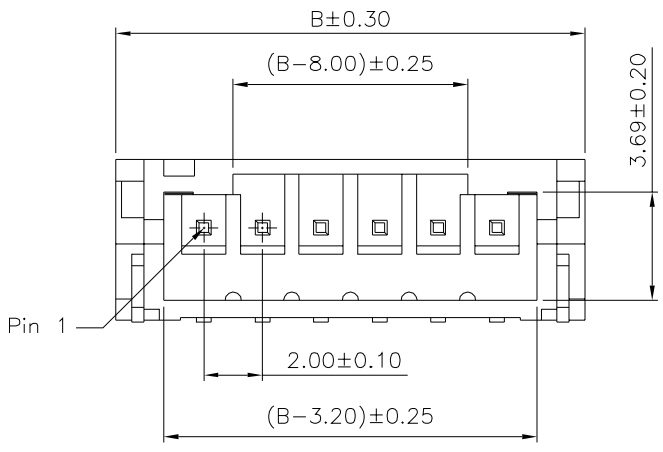

Pin	A	B	Pin	A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			

**4U CON** 元化興業股份有限公司  
 4U CON TECHNOLOGY INC.

DRAWING No. 21737

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

SCALE NONE REV. C1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X  $\pm 0.25$   
 .XX  $\pm 0.20$  .X\*  $\pm 2^\circ$   
 .XXX  $\pm 0.10$  .XX\*  $\pm 1^\circ$

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ C1		Modify Data	HZF	03/01/2016
△ C0		NEW RELEASE	HZF	09/25/2013