

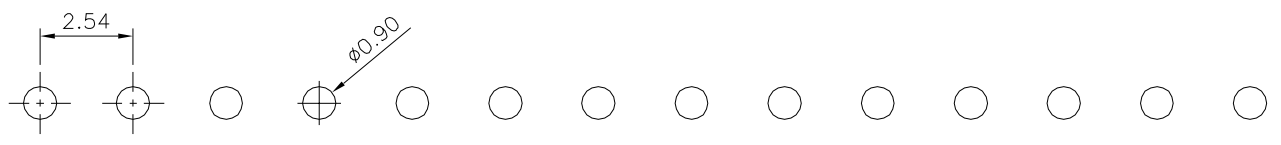
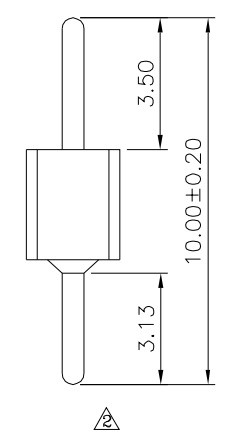


SPECIFICATION

Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operating Voltage: 60V AC/DC
 Operating Temperature: -55°C~+105°C
 Pin: Brass, Gold Flash Over All, Over Nickel
 Insulator: PPS(UL94V-0), Black
 RoHS Compliant

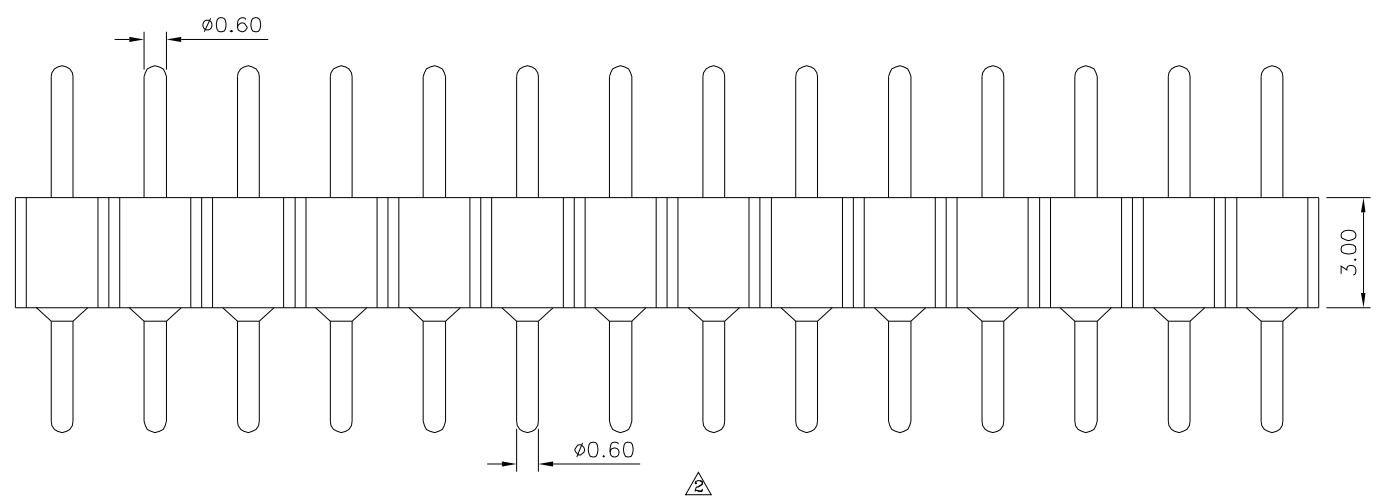

Recommended P.C.B. Layout

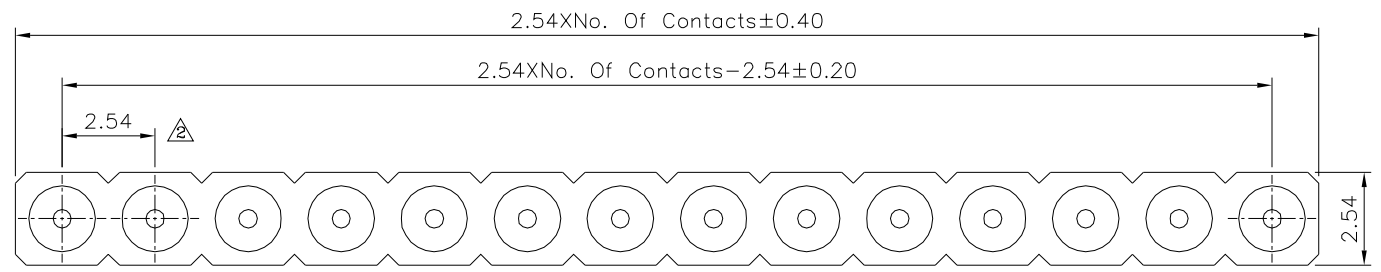

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. **21748**

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ± 0.50
 XX ± 0.30
 XXX ± 0.20
 XXX ± 0.10
 ANG. $\pm 5^\circ$
 UNIT mm

	A2	Modify Data	HZF	02/27/2019
	A1	Modify Data	HZF	08/03/2016
	A0	NEW RELEASE	HZF	01/20/2016
NO. REV.	REVISIONS		CHK	DATE

SCALE NONE