



SPECIFICATION





Current Rating:2.0 Amps/Contact Max.
 Contact Resistance:20 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Withstand Voltage:450V AC/Minute
 Operating Temperature:-55°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

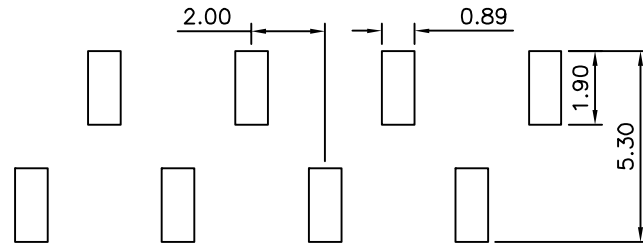

Recommended P.C.B. Layout
Standard Layout

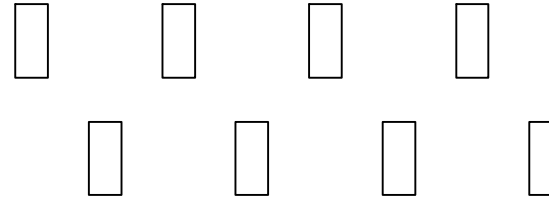

Recommended P.C.B. Layout
Reverse Layout

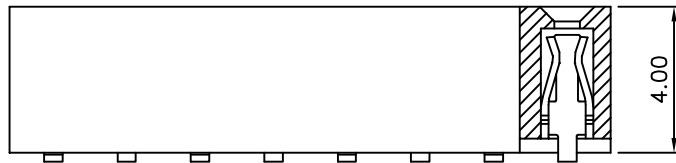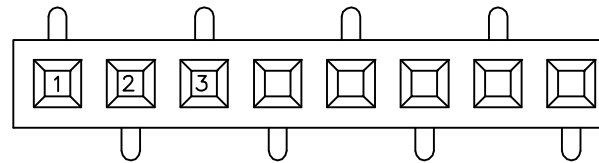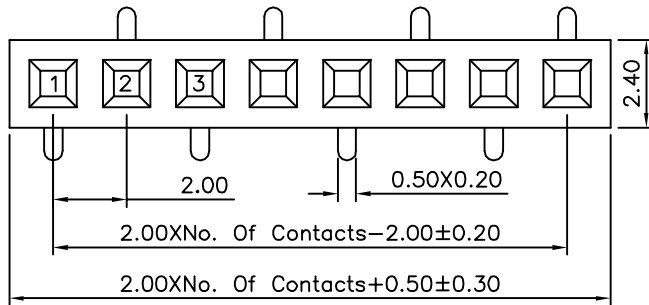

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21750

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

REV. A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
XX ±0.30
XXX ±0.20
ANG. ±5°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	09/18/2014