
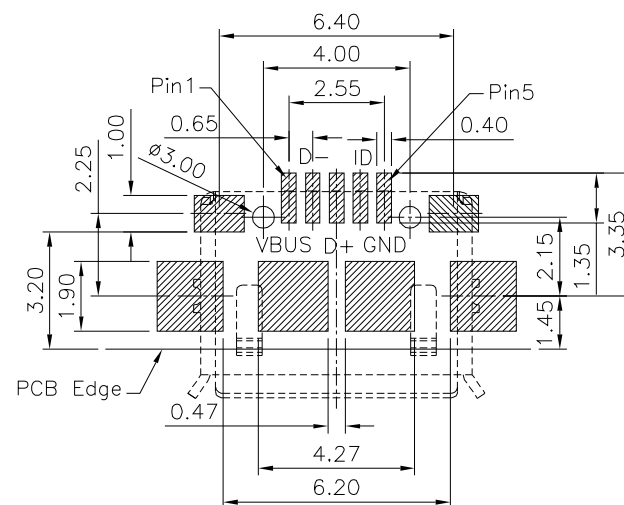
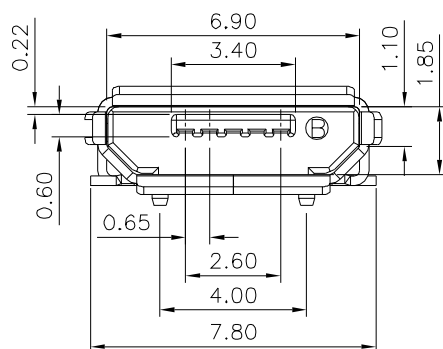
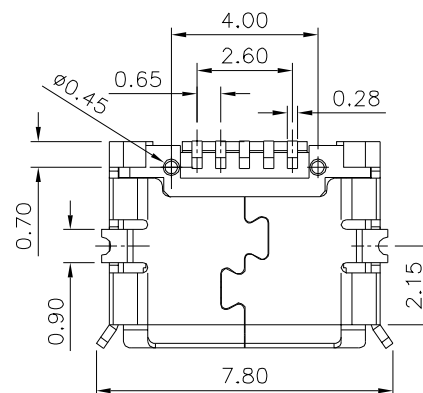




△△ SPECIFICATION

Current Rating:1.0A
 Voltage Rating:100V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Dielectric Withstanding Voltage:200V AC For One Minute
 Operating Temperature:-30°C~+80°C
 Insertion Force:3.57Kgf Max.
 Withdrawal Force:1.0Kgf
 Insulator:LCP(UL94V-0)
 Contact:Brass
 Gold Flash Over All,Over Nickel
 Shell:Stainless Steel,Matte Tin Plated
 RoHS Compliant

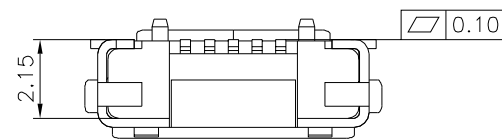

Recommended P.C.B. Layout
 (PCB Board Tolerance±0.05)

Contact Number	Signal Name	Typical Wiring Assignment
1	VBUS	Red
2	D-	White
3	D+	Green
4	ID	<Ro_PLUG_ID
5	GND	Black
Shell	Shield	Drain Wire

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△

21763

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.38
 X. ±0.30
 X. ±0.25
 XXX ±0.15
 ANG. ±5°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	04/01/2020
△	A1	Modify Data	HZF	04/17/2018
△	A0	NEW RELEASE	HZF	03/21/2016

SCALE NONE REV. A2