

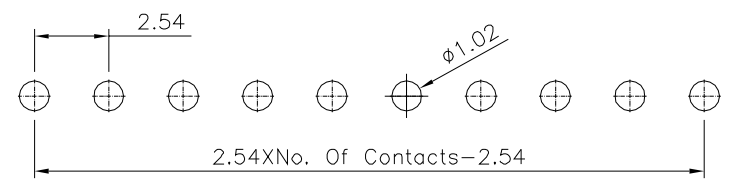
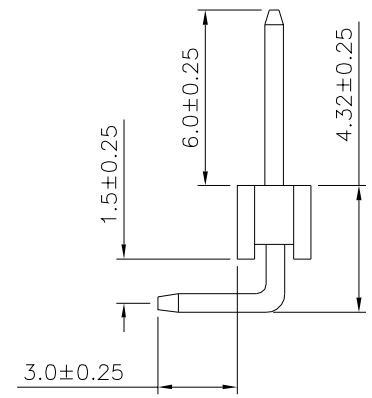


**△ SPECIFICATION**

Current Rating:3 Amp  
 Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Operating Temperature:-40°C~+105°C  
 Housing:PA9T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

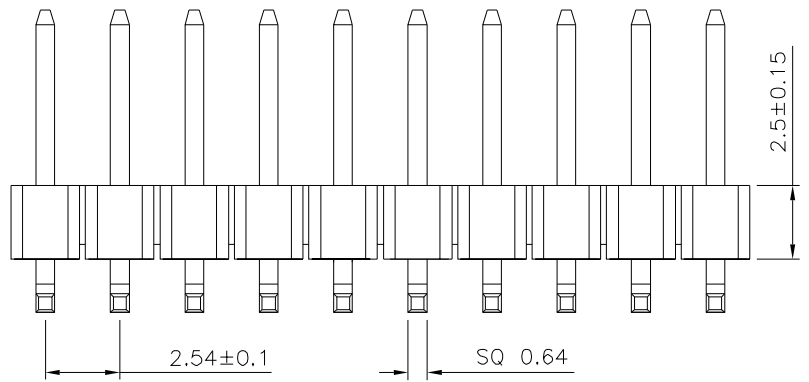

Recommended P.C.B. Layout(Top View)  
 (PCB Board Tolerance±0.05)

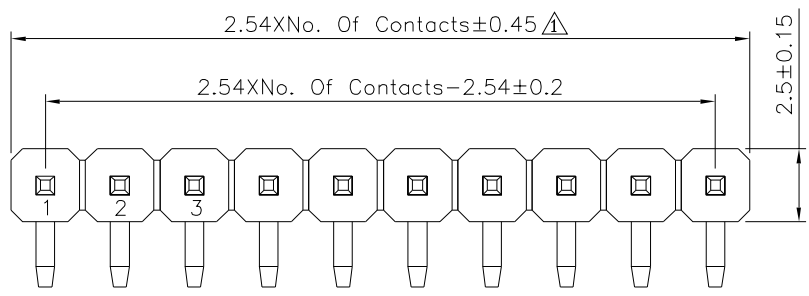

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X. ±2° .X ±0.20 .X ±1.5° .XX ±0.15 .XX ±1° .XXX ±0.10 .XXX ±0.5°
21794		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	CYP	
REV.	A2	UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data.	HZF	04/11/2023
△ A1		Modify Data.	HZF	12/19/2016
△ A0		NEW RELEASE	HZF	11/22/2014