
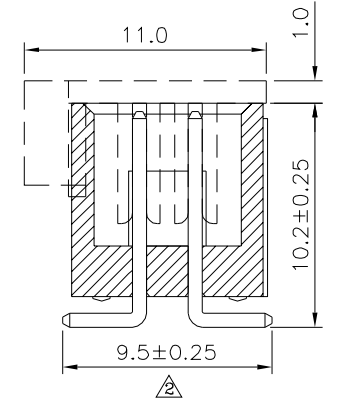
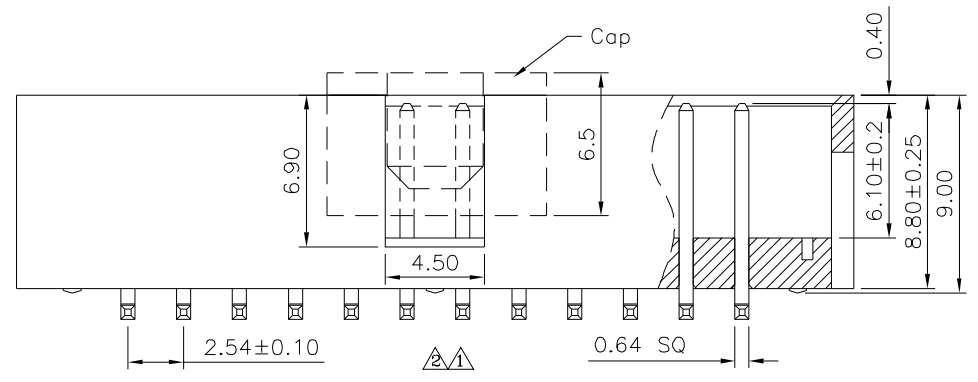


Recommended P.C.B. Layout
 PCB Tolerance: ±0.05 (Top View)

SPECIFICATION
 Current Rating: 3 Amps
 Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Insulator: PA9T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

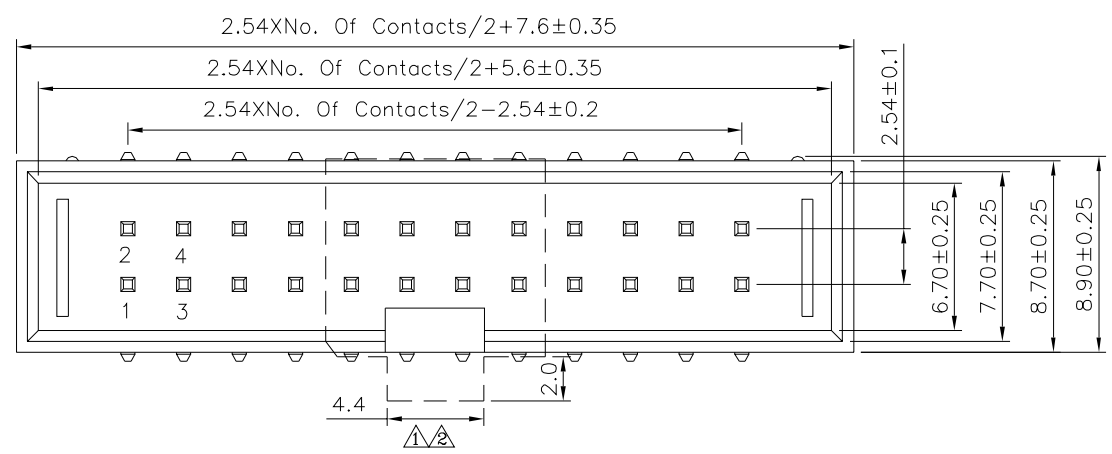

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5* UNIT mm
21800		MEI		
SCALE NONE		CHECKED BY HZF		
REV. A2		DRAWING BY CYP		
		REV. A2		NO. REV.

A2		Modify Data	HZF	05/30/2023
A1		Modify Data	HZF	01/14/2019
A0		NEW RELEASE	HZF	12/01/2015
NO. REV.		REVISIONS	CHK	DATE