

File No.	6970D06806	SHEET	1/1

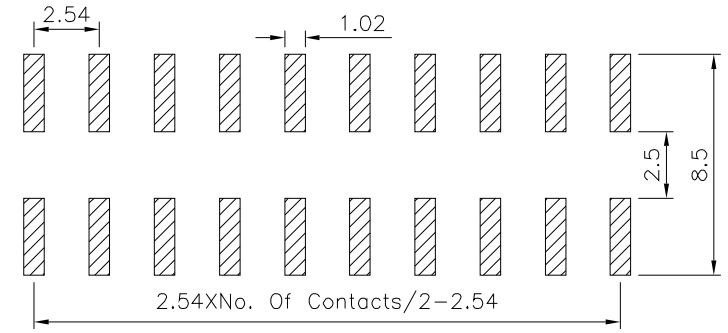



Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

SPECIFICATION

Current Rating: 3A
1 Withstand Voltage: 1000V AC Min./Minute
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: −40°C~+105°C
2 Housing: PA9T(UL94V-0),Black
Contact: Brass,Gold Flash Over Nickel
RoHS Compliant

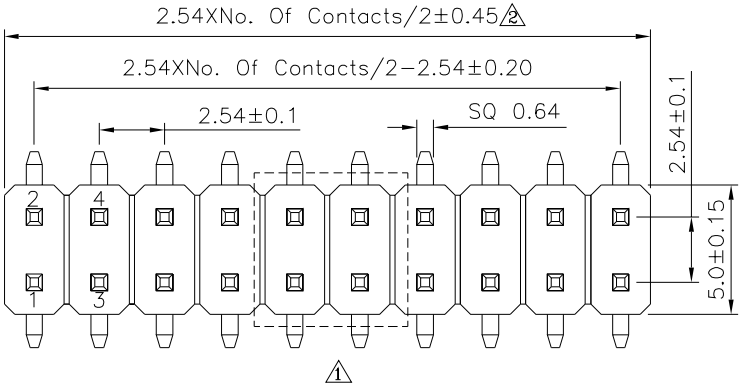

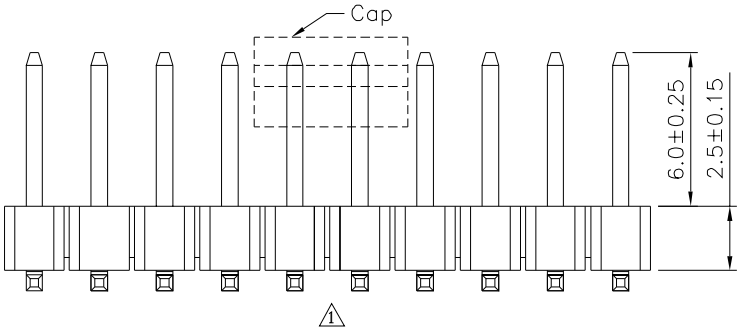

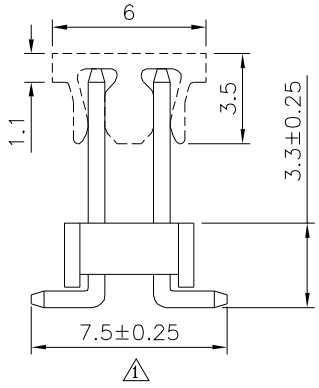

2	A2	Modify Data	HZF	04/06/2024
1	A1	Modify Data	HZF	09/30/2016
0	A0	NEW RELEASE	HZF	01/03/2014
NO.	REV.	REVISIONS	CHK	DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	CHECKED BY	DRAWING BY
21850	MEI	HZF	CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 2

X. ±0.30	X.° ±2°		
.X ±0.25	.X° ±1.5°		
.XX ±0.20	.XX° ±1°		
.XXX ±0.15	.XXX° ±0.5°		

SCALE	NONE	REV.	A2	UNIT mm