

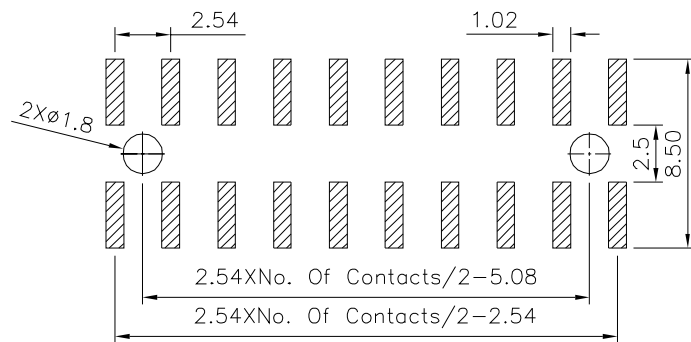
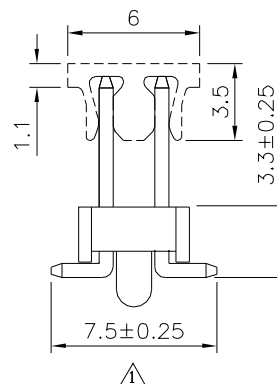


SPECIFICATION

Current Rating:3A
 ⚠ Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

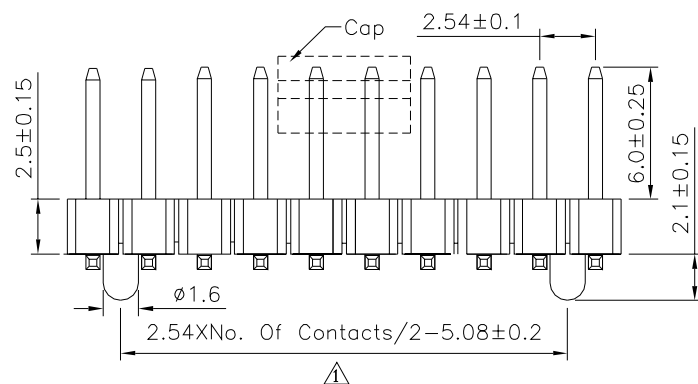

⚠ Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

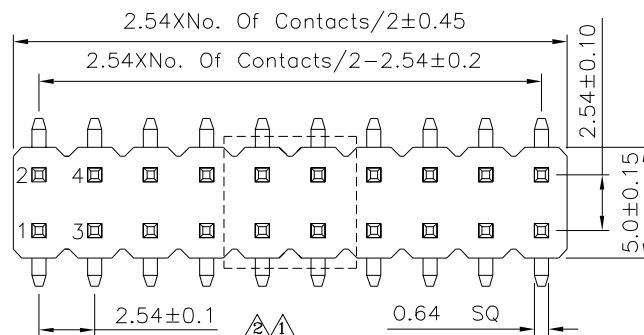

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21942

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.25 X.* ±2*
 .X ±0.20 .X* ±1.5*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	03/09/2020
⚠	A1	Modify Data	HZF	06/29/2018
⚠	A0	NEW RELEASE	HZF	08/25/2013