

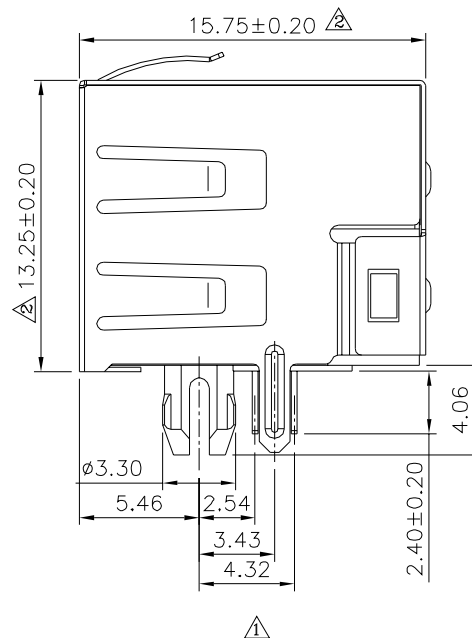


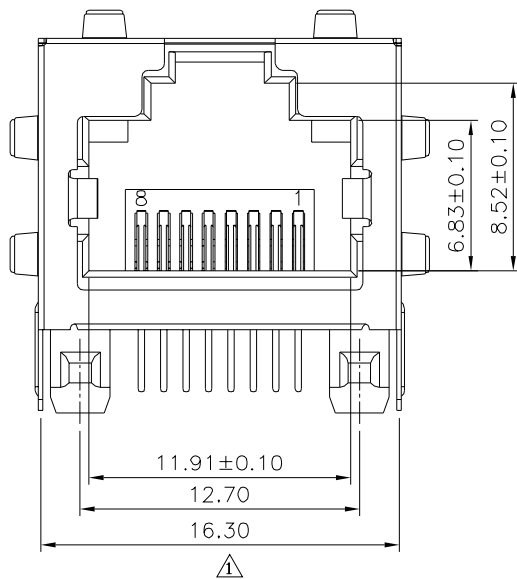


SPECIFICATION

Current Rating:1.5 Amp
Voltage Rating:125V AC RMS
Dielectric Strength:500V AC Or 750V DC RMS
At 0.5mA 50Hz/60Hz For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 500V DC
Mating/Unmating Force:30N/3.06 Kgf Max.
Retention Strength:50N Min. For 60s±5s
Operating Life:750 Cycles Min.
Housing&Insert:PBT(UL94V-0),Black
Contact:Phosphor Bronze
Gold Plated 6u" On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Shield:Brass,Nickel Plated
Storage Temperature:-40°C~+85°C Relative Humidity<80%
Operation Temperature:-40°C~+85°C
Mates With Modular Plug Conforming To
FCC Part 68,Subpart F.

△ Split Type
RoHS Compliant

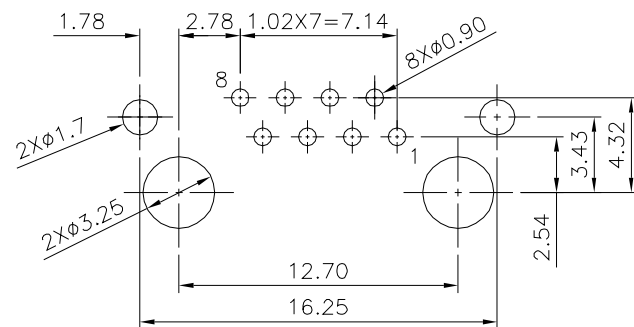

△ Recommended P.C.B Layout(Component Side)
(PCB Board Tolerance±0.05) Thickness=1.60mm

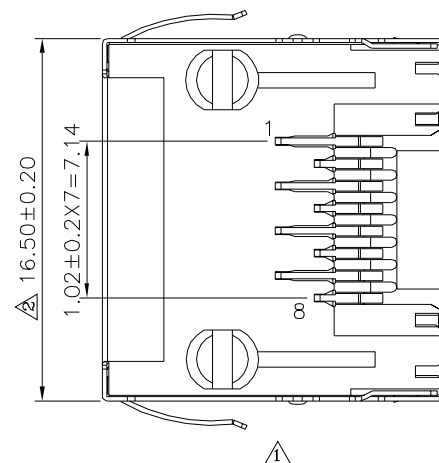

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

21959

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
0~15 ±0.15
△ 15~30 ±0.20
30~ ±0.25
ANG. ±1°

SCALE

NONE

REV.

B2

UNIT
mm



	B2	Modify Data	HZF	04/16/2020
	B1	Modify Data	HZF	02/14/2017
	B0	NEW RELEASE	HZF	11/04/2014
NO	REV	REVISIONS	CHK	DATE