

SPECIFICATION

1. Material&Finish

Housing:PBT+G.F.(UL94V-0),Black

Contact:Phosphor Bronze,Tin Plated Over Nickel

2. Electrical Characteristics

Current Rating:1A

Withstanding Voltage:500V AC/Minute







Insulation Resistance:500 Megaohms Min.

Contact Resistance:30 Milliohms Max.

3. Environmental Characteristics

Temperature Range:-20°C~+85°C

4. RoHS Compliant

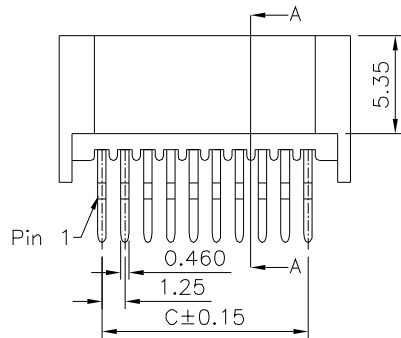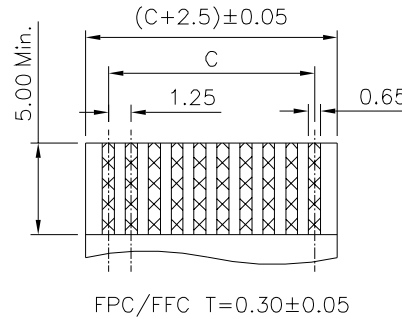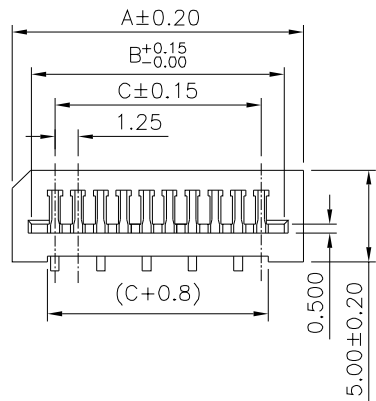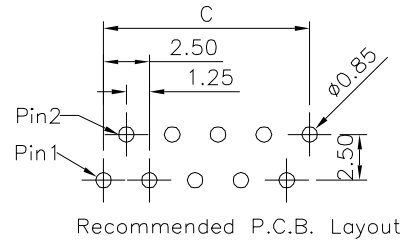

| Pin | A | B | C | Pin | A | B | C |
|-----|-------|-------|-------|-----|-------|-------|-------|
| 2 | 5.90 | 3.80 | 1.25 | *20 | 28.40 | 26.30 | 23.75 |
| 3 | 7.15 | 5.05 | 2.50 | *21 | 29.65 | 27.55 | 25.00 |
| *4 | 8.40 | 6.30 | 3.75 | *22 | 30.90 | 28.80 | 26.25 |
| *5 | 9.65 | 7.55 | 5.00 | 23 | 32.15 | 30.05 | 27.50 |
| *6 | 10.90 | 8.80 | 6.25 | *24 | 33.40 | 31.30 | 28.75 |
| *7 | 12.15 | 10.05 | 7.50 | 25 | 34.65 | 32.55 | 30.00 |
| *8 | 13.40 | 11.30 | 8.75 | 26 | 35.90 | 33.80 | 31.25 |
| *9 | 14.65 | 12.55 | 10.00 | *27 | 37.15 | 35.05 | 32.50 |
| *10 | 15.90 | 13.80 | 11.25 | *28 | 38.40 | 36.30 | 33.75 |
| *11 | 17.15 | 15.05 | 12.50 | 29 | 39.65 | 37.55 | 35.00 |
| *12 | 18.40 | 16.30 | 13.75 | *30 | 40.90 | 38.80 | 36.25 |
| *13 | 19.65 | 17.55 | 15.00 | 31 | 42.15 | 40.05 | 37.50 |
| *14 | 20.90 | 18.80 | 16.25 | 32 | 43.40 | 41.30 | 38.75 |
| *15 | 22.15 | 20.05 | 17.50 | 33 | 44.65 | 42.55 | 40.00 |
| *16 | 23.40 | 21.30 | 18.75 | 34 | 45.90 | 43.80 | 41.25 |
| *17 | 24.65 | 22.55 | 20.00 | 35 | 47.15 | 45.05 | 42.50 |
| *18 | 25.90 | 23.80 | 21.25 | 36 | 48.40 | 46.30 | 43.75 |
| *19 | 27.15 | 25.05 | 22.50 | | | | |

The Mark Of "*" Are Tooled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21965

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.30
.X ±0.20
.XX ±0.10
.XXX ±0.05


SCALE

NONE

REV.

A0

UNIT mm



NO. REV.

A0 NEW RELEASE
REVISIONS

CHK HZF

03/01/2020
DATE