
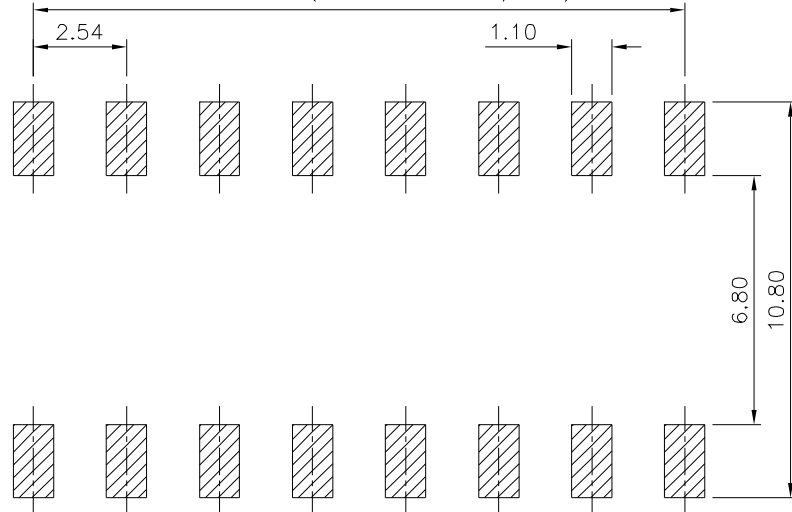


$$B \pm 0.10 = 2.54 \times (\text{No. Of Contacts} / 2 - 1)$$

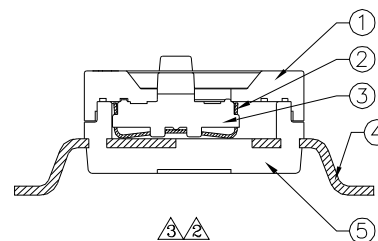

Recommended P.C.B. Layout

**△ SPECIFICATION**

Current Range:

Non-Switching: 100mA 50V DC

Switching: 25mA 24V DC

Dielectric Withstanding Voltage: 500V AC For One Minute

Contact Resistance: 100 Milliohms Max.(Initial)

Insulation Resistance: 100 Megaohms Min.



At 500V DC, 60s ± 5s

Operation Temperature Range: -20°C ~ +85°C


Operation Force: 9.8N Max.

RoHS Compliant

Pin	A	B
01	2.44	
02	4.98	2.54
03	7.52	5.08
04	10.06	7.62
05	12.60	10.16
06	15.14	12.70
07	17.68	15.24
08	20.22	17.78
09	22.76	20.32
10	25.30	22.86
12	30.38	27.94

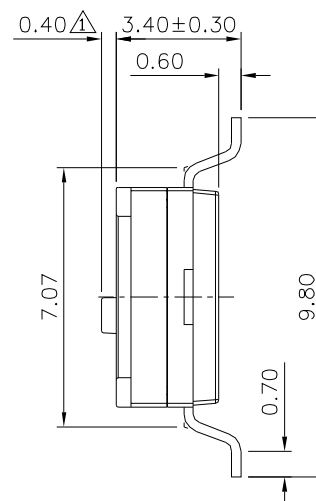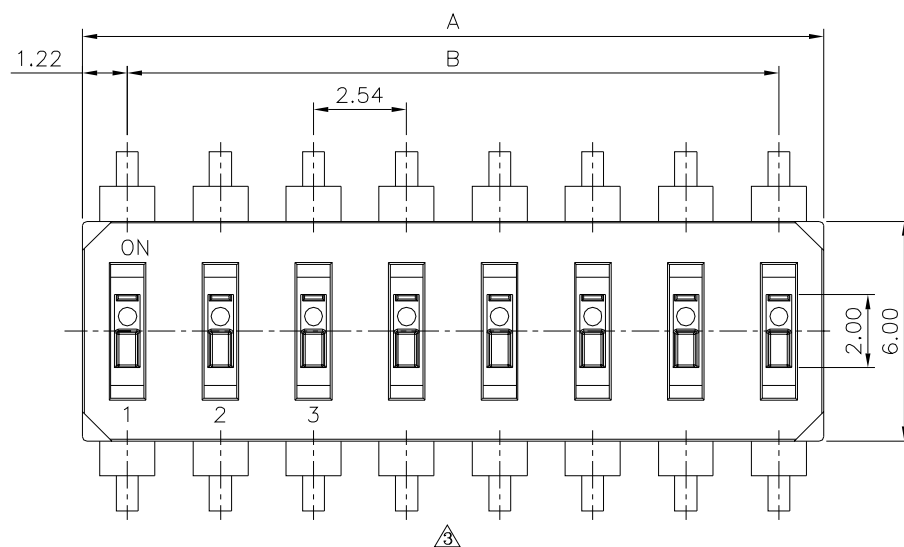

Schematic(Type)



(1,2,3,4,5,6,7,8,9,10,12 Pos. Avail)

⑤	Base	1	PA9T,UL94V-0	Black
④	Terminal	1	Brass	Gold Plated Over Nickel
③	Actuator	*	LCP,UL94V-0	White
②	Contact	*	C7035	Gold Plated At Contact Area
①	Cover	1	PA9T,UL94V-0	Black
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

22011

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ± 0.20

△ .XX ± 0.20

ANG.

UNIT

mm



△ B3

Modify Data

HZF

07/04/2018

△ B2

Modify Data

HZF

11/09/2010

△ B1

Modify Data

HZF

11/24/2009

△ B0

NEW RELEASE

INGRID

02/05/2008

NO. REV.

REVISIONS

CHK

DATE