

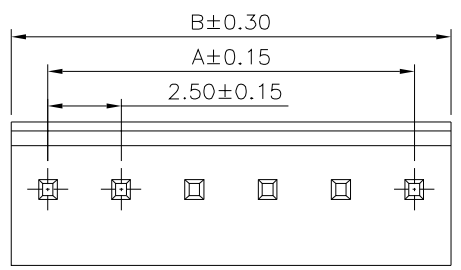


Recommended P.C.B. Layout

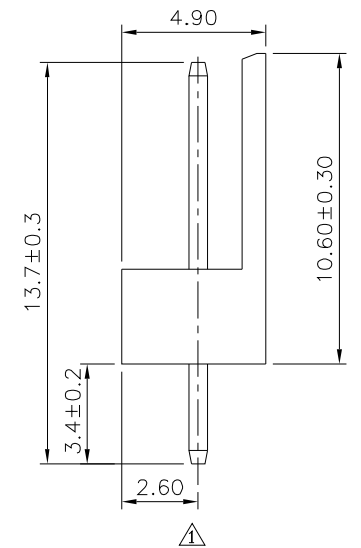

⚠

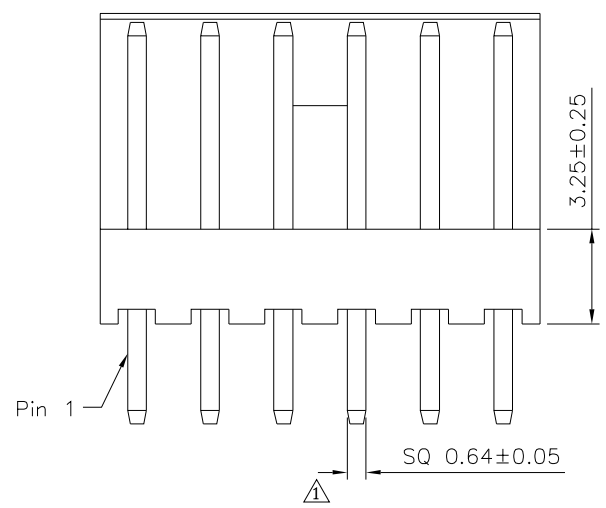

⚠

SPECIFICATION
 Current Rating: 3A AC/DC
 ⚠ Voltage Rating: 250V AC/DC
 Withstand Voltage: 800V AC/Minute
 Insulation Resistance: 1000 Megaohms Min.
 Pin: Brass, Tin Plated
 Base: PA66 (UL94V-0)
 RoHS Compliant

⚠

Pin	A	B
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠
 22207

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ± 0.50
 .XX ± 0.25
 .XXX ± 0.10
 ANG. ± 2°

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	06/27/2015
⚠ A0		NEW RELEASE	HZF	07/18/2011