


SPECIFICATION

Voltage Rating:DC 300V AC 300V
 Contact Resistance:2 Ohms
 Insulation Resistance:20 Megaohms
 Test Time 0.6 Sec.
 Short/Open Circuit At Moment:4/Sec.(Being Flexed Test)
 RoHS Compliant

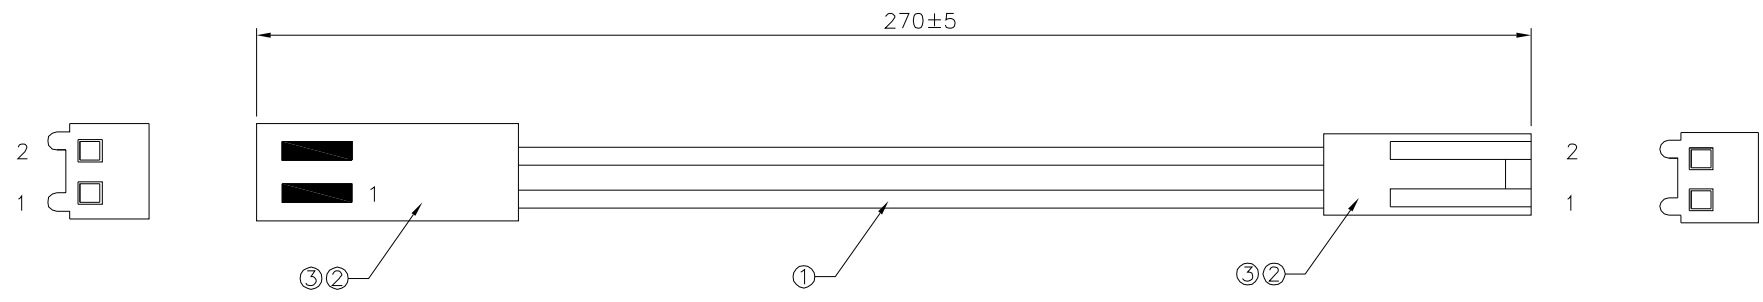

Pin Assignment		
P1	Color	P2
1	Black	1
2	Black	2

Item	Name	Specification	Q'ty
①	Wire	UL1007 26 AWG	2 PCS
②	Housing	PH 2.54mm MK Housing,2P	2 PCS
③	Terminal	PH2.54mm MK Matching Terminal	4 PCS

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
22261		MEI		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A0	UNIT mm

△ A0	NEW RELEASE	HZF	03/03/2022
NO.REV.	REVISIONS	CHK	DATE