

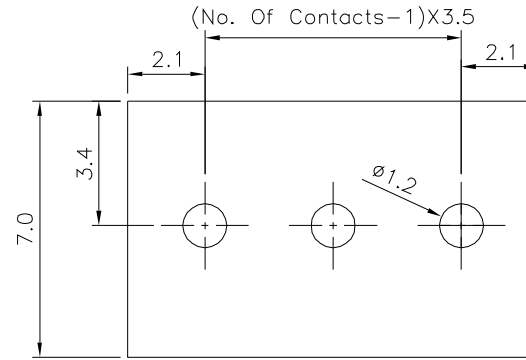
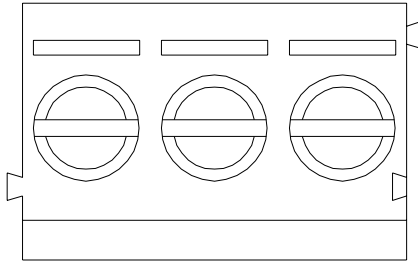


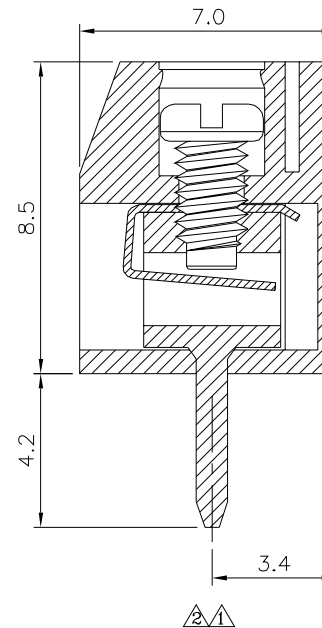

Recommended P.C.B. Layout

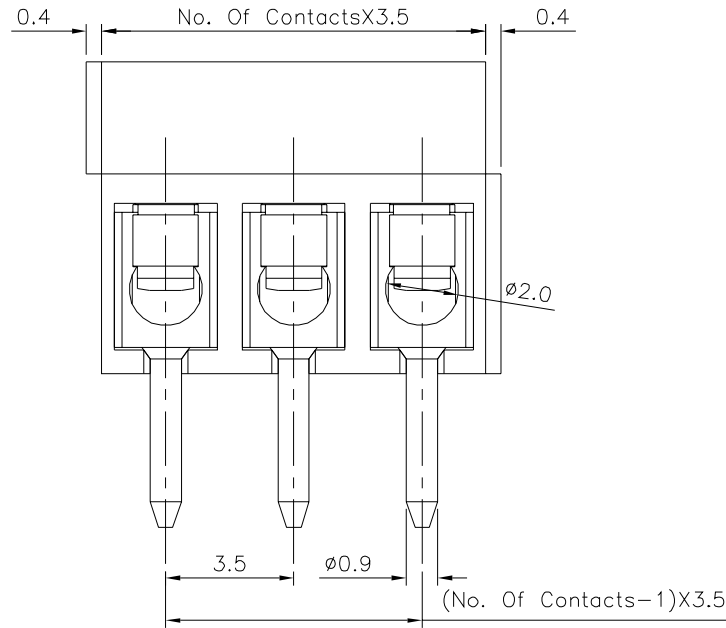

SPECIFICATION

Current Rating: 10 Amp/Way Max.
 Voltage Rating: 150V AC
 Withstanding Voltage: 2000V AC/Minute
 Test Time=60 Seconds/Pcs
 Contact Resistance: 20 Milliohms Max.
 Wire Range: 16~30AWG
 Torque: 2.0 Kgf.cm/M2
 Operation Temperature: -40°C~+105°C
 Soldering Reliability: Test Temperature=250°C±10°C
 5 Seconds Max.
 Terminal: Copper Alloy, Tin Plated
 Screw: Steel, Galvanized And With Cr3+ Plated
 Wire Guard: Stainless Steel
 Insulator: Polyamide(UL94V-0), Blue
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22274

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	04/05/2017
2	A2	Modify Data	HZF	09/15/2014
1	A1	Modify Data	HZF	05/19/2011
0	A0	NEW RELEASE	HZF	03/08/2010