


△

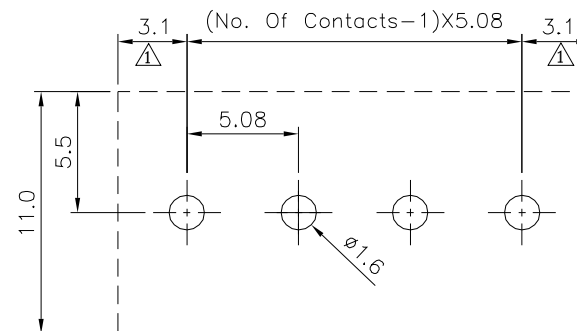

Recommended P.C.B. Layout

△ SPECIFICATION

Current Rating:16 Amps/Way Max.

Voltage Rating:300V AC

Contact Resistance:20 Milliohms Max.

Withstanding Voltage:2500V AC(1 Minute)

Test Time=60s/1 PCS

Wire Range:12~30 AWG

Operation Temperature:-40°C~+105°C

Soldering Reliability:250°C±10°C/5 Seconds Max.

△ Torque:4.5 Kgf.cm/M3



Insulator Body(Housing):Polyamide(UL94V-0),Green

Contact(Metal Housing):Copper Alloy,Nickel Plated

Solder Pin:Copper Alloy,Tin Plated

Terminal Screw:Steel,Galvanized With Cr3+ Plated

RoHS Compliant

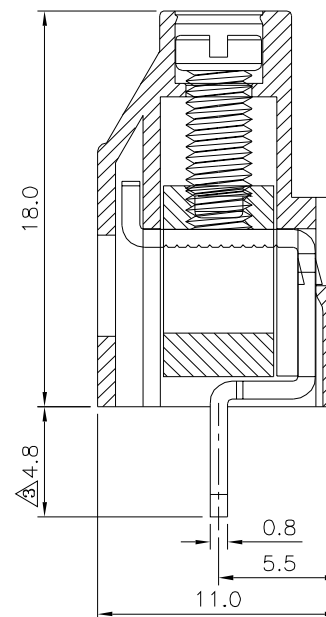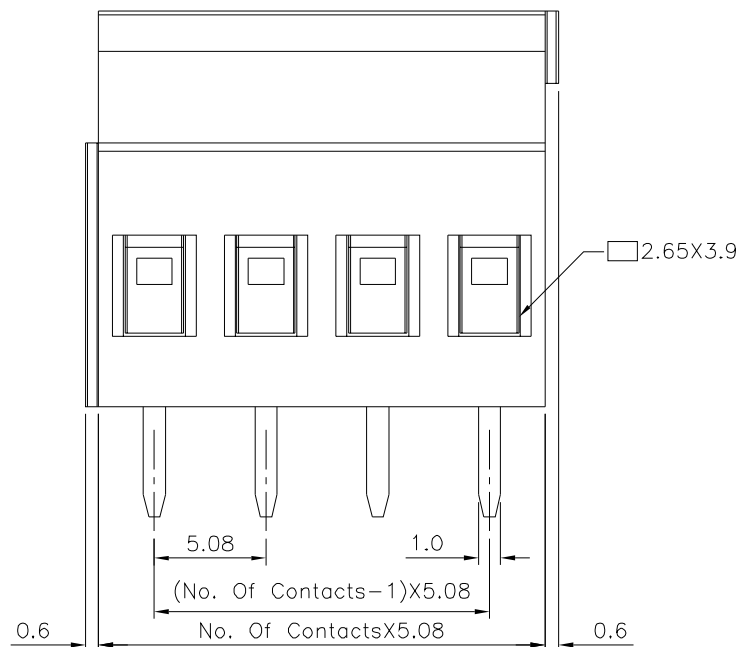

△

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

22291

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT
mm



△ A3

Modify Dim.

HZF

04/26/2016

△ A2

Modify Data

HZF

07/10/2013

△ A1

Modify Data

HZF

01/06/2012

△ A0

NEW RELEASE

HZF

09/23/2009

NO. REV.

REVISIONS

CHK

DATE