

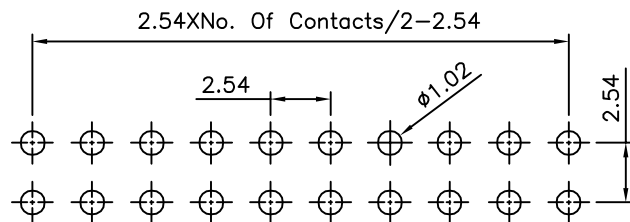


SPECIFICATION

Current Rating:3A
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

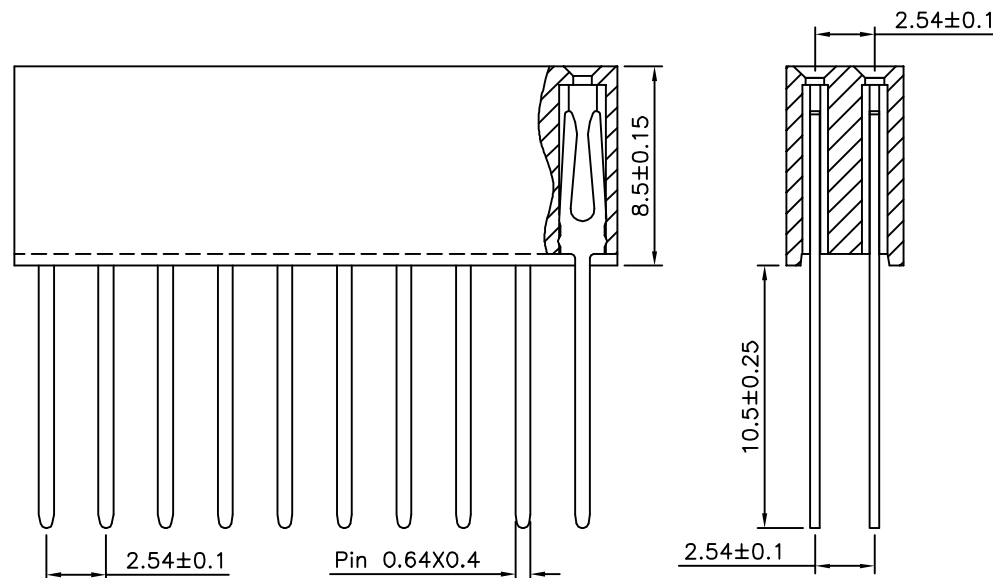

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05)

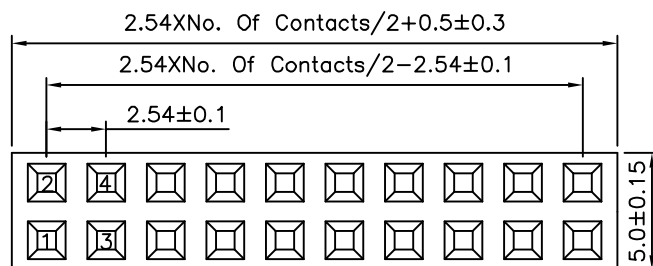

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22323

APPROVED BY
 EMILY

CHECKED BY
 HZF

DRAWING BY
 SAN


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25 X.* ±2°
 .X ±0.20 .X* ±1.5°
 .XX ±0.15 .XX* ±1°
 .XXX ±0.10 .XXX* ±0.5°

SCALE NONE

REV. A0

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	10/04/2013