




SPECIFICATION

Voltage Rating:300V AC
Current Rating:12 Amps/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60 Sec/Pcs
Wire Range:16~24AWG
Torque:2.5 kgf.cm/M2
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Contact(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant
* 02~24P Available

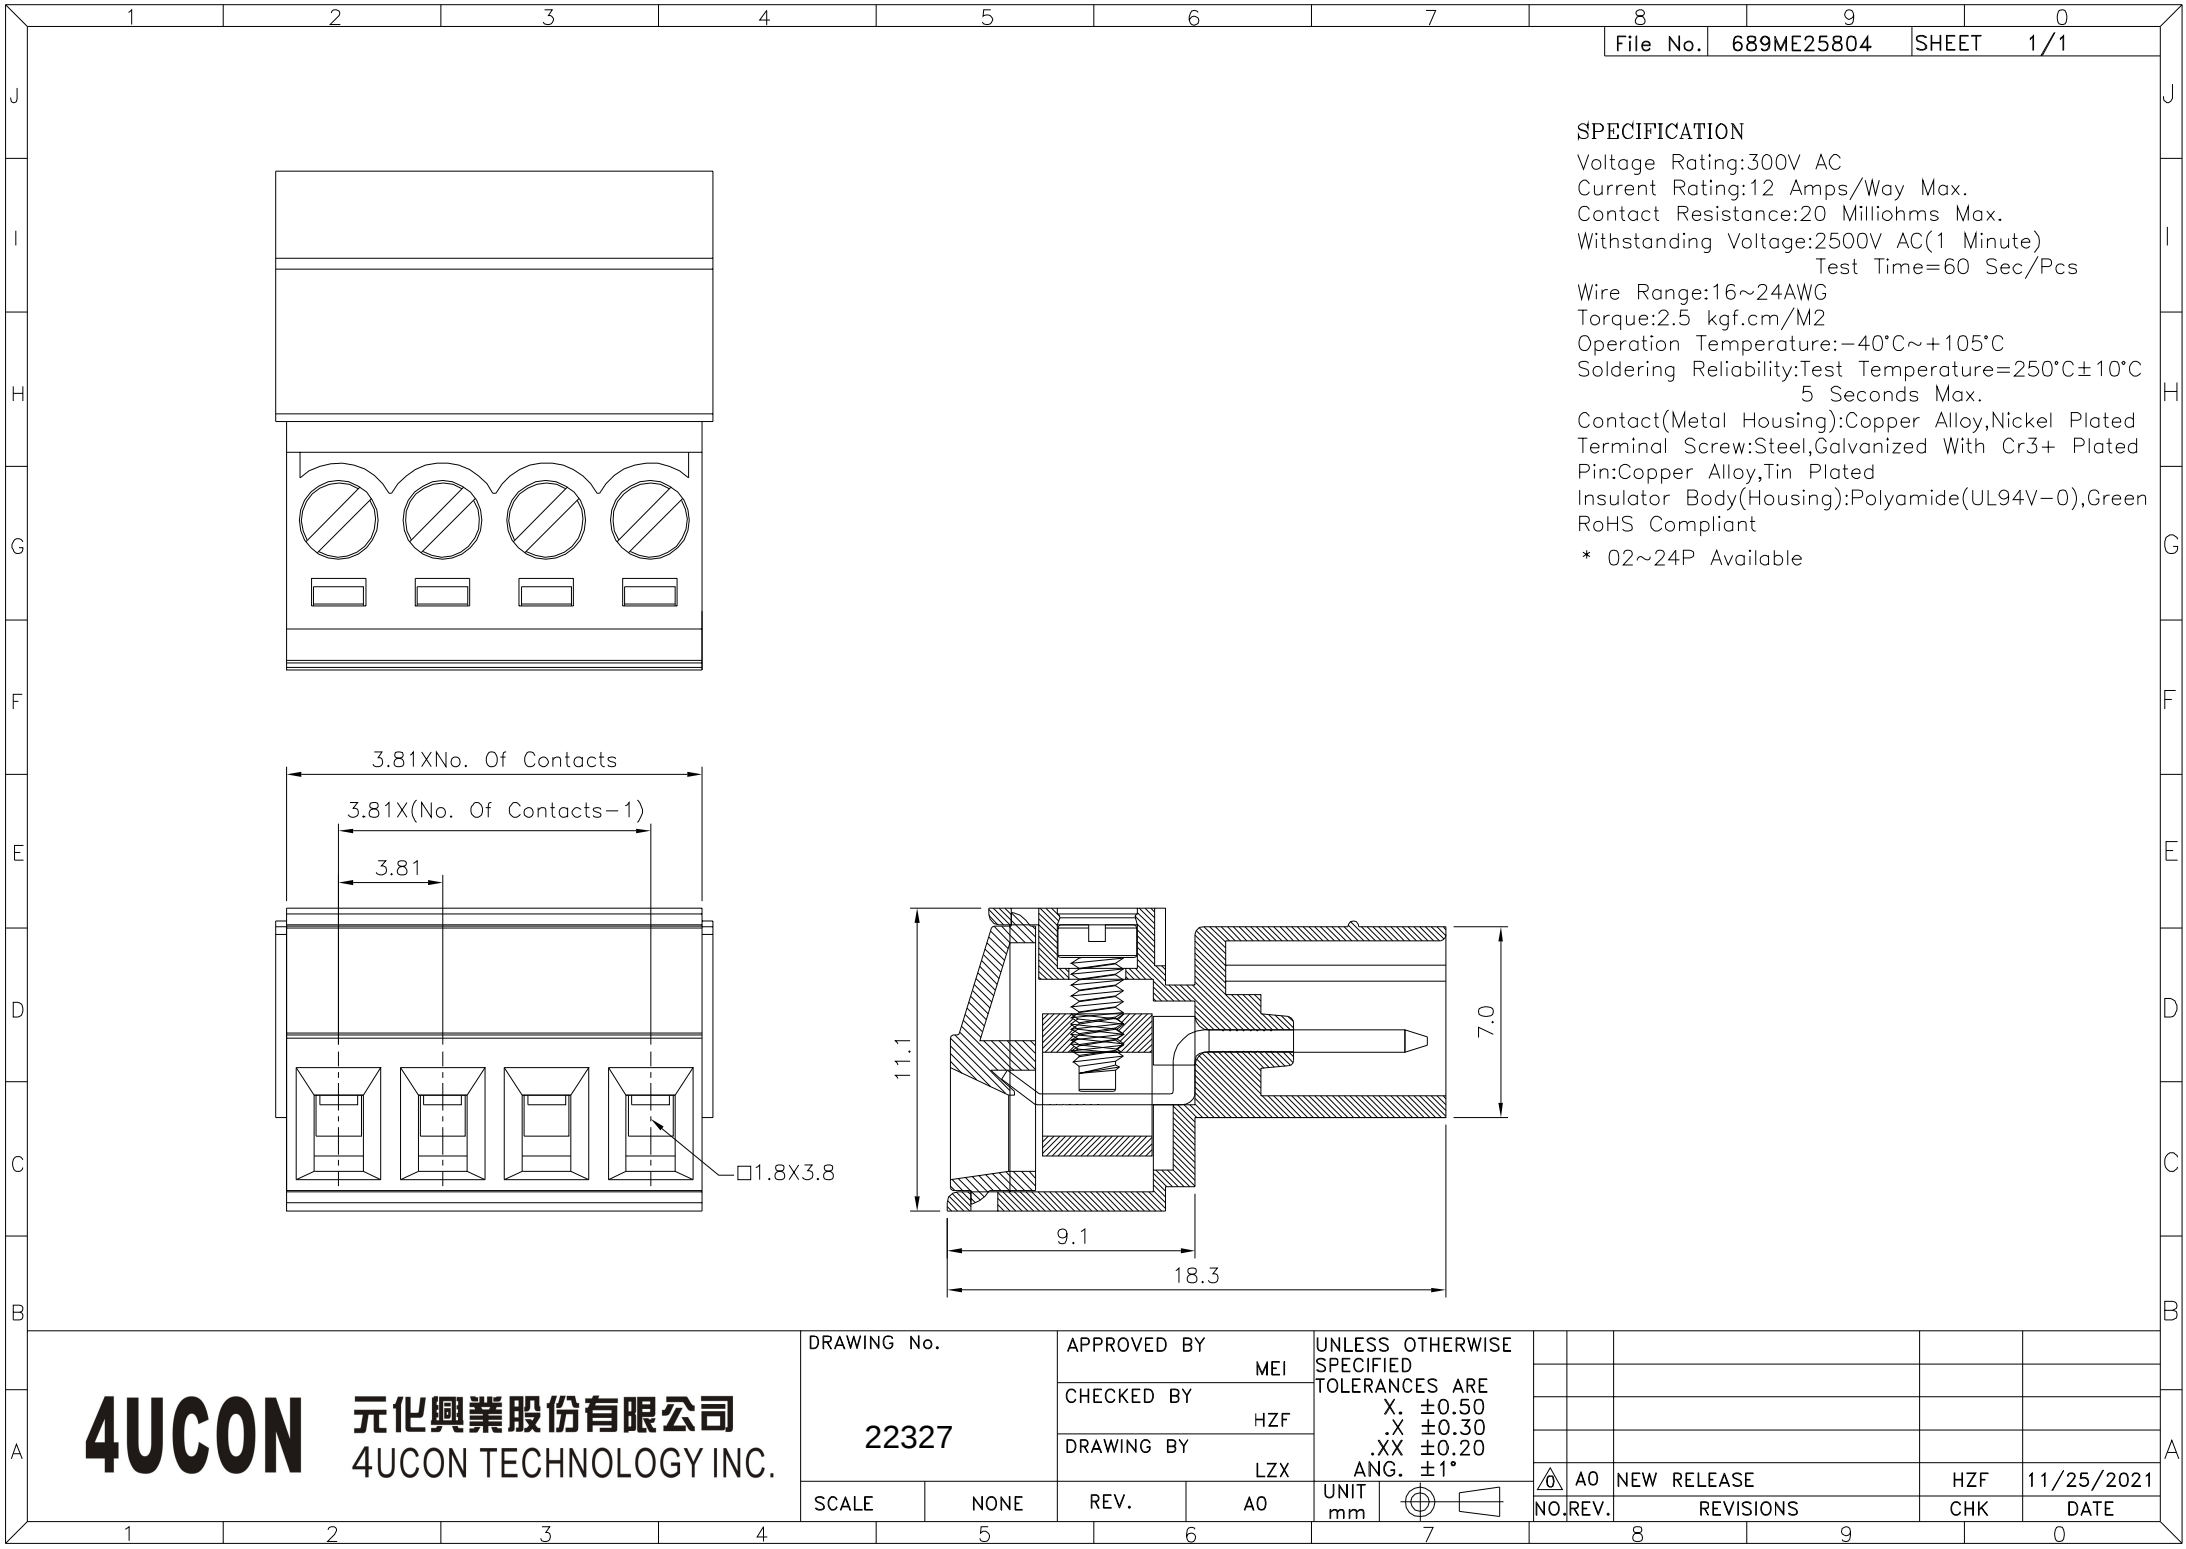