

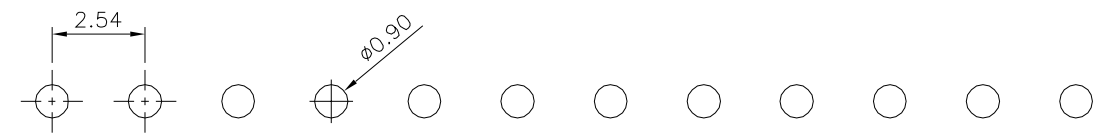


△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
 Operation Voltage:60V AC/DC
 Contact Resistance:4 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-40°C~+105°C
 Insulator:PPS(UL94V-0),Black
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

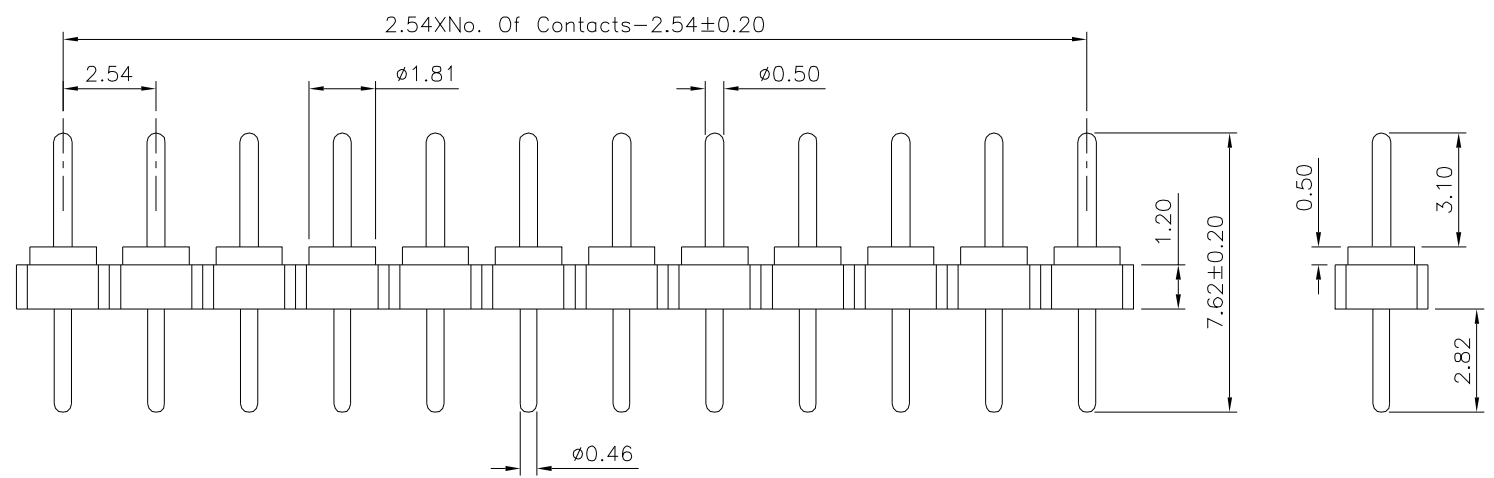

Recommended P.C.B. Layout
 △ Tolerance ±0.05

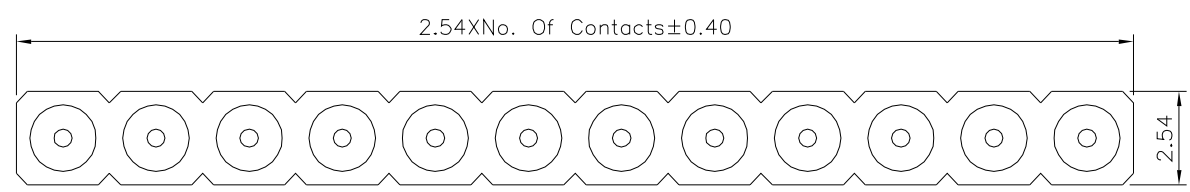

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 XXXX ±0.10 ANG. ±5°
22345		EMILY		
		CHECKED BY		
		HZF		UNIT mm
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modiyf Data	HZF	10/22/2021
△ A0		NEW RELEASE	HZF	07/24/2012