



SPECIFICATION

Contact Resistance:3 Ohms Max.
 Insulation Resistance:10 Megaohms Min.
 100% Open/Short Test
 DC Test 300V
 RoHS Compliant

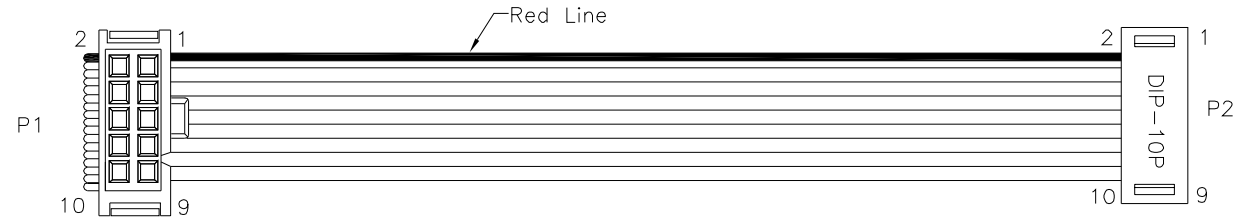

Pin Assignment

| P1 | P2 |
|----|----|
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| 10 | 10 |

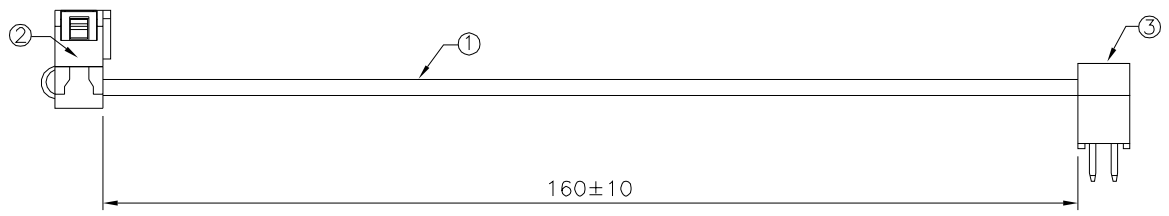

| No. | Name | Q'ty | Description |
|-----|-----------|------|---|
| ① | Wire | — | UL2651 28AWG,PH1.27mm 10P Gray Flat Cable With Red Side |
| ② | Connector | 1 | PH2.54 IDC Socket With SR, 10Pin,Black |
| ③ | Connector | 1 | PH2.54 DIP Plug,0.1" 10Pin,Selective Gold Flash |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.5 ANG. ±0.5° |
| 22366 | | MEI | | |
| | | CHECKED BY | | |
| | | HZF | | |
| DRAWING BY | | LZX | | |
| SCALE | NONE | REV. | A0 | UNIT mm |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 07/21/2022 |