File No.	7790G11217	SHEET	1/1

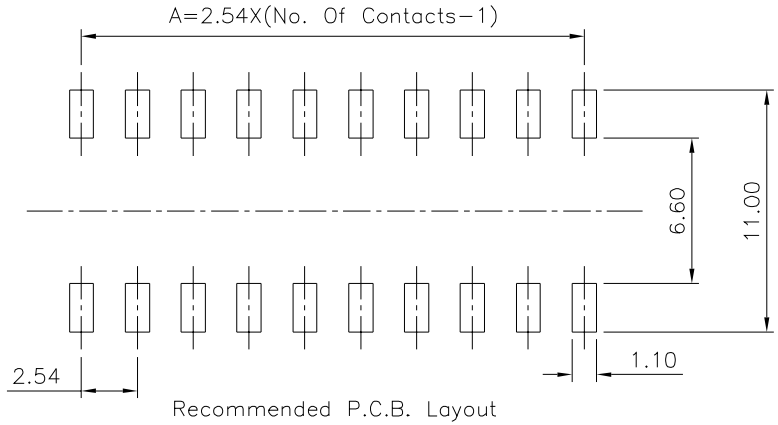

⚠1 SPECIFICATION

Current Rating:Non−Switching:DC 50V 100mA
Switching:DC 24V 25mA
Contact Resistance:100 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Withstand Voltage:500V AC(50Hz Or 60Hz)/Minute
Operation Temperature:−20°C~+85°C
RoHS Compliant

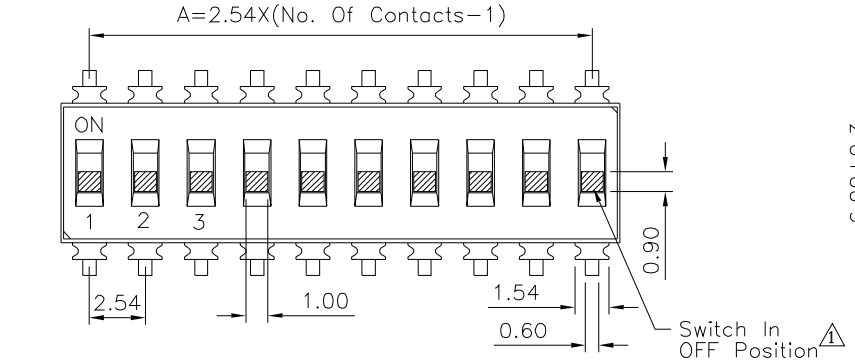

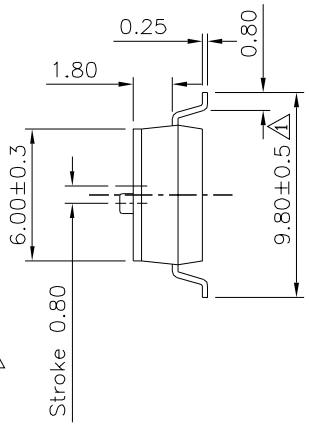

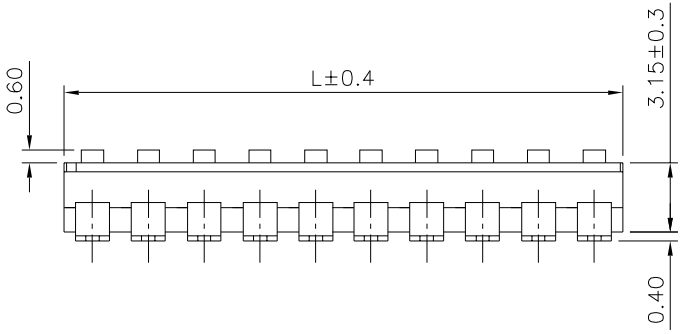

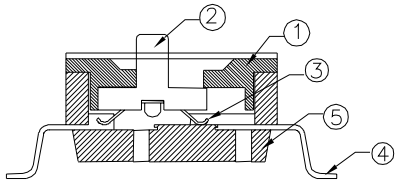

Item	Name	Material	Remark
①	Cover	PPS	Black
②	Autuator	LCP	White
③	Contact	Phosphor Bronze	Gold Plated Over Nickel
④	Terminal	Brass	Gold Plated Over Nickel
⑤	Base	PPS	Black

Schematic	Pin	L	A
	1	2.54	
	2	5.08	2.54
	3	7.62	5.08
	4	10.16	7.62
	5	12.70	10.16
	6	15.24	12.70
	7	17.78	15.24
	8	20.32	17.78
	9	22.86	20.32
	10	25.40	22.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠1		APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
22367		CHECKED BY	HZF	.XX ±0.2	
		DRAWING BY	LZX	.XX° ±2.0°	
SCALE	NONE	REV.	A1	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
⚠1	A1	Modify Data	HZF	07/11/2024
⚠0	A0	NEW RELEASE	HZF	09/12/2021