
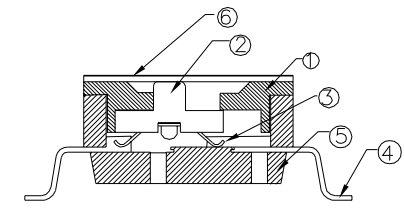
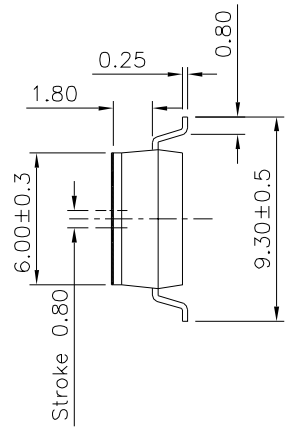


SPECIFICATION
 Rating:DC 24V 25mA
 Contact Resistance:100 Milliohms Max.
 Operating Force:1000gf Max.
 Durability:3000 Cycles
 RoHS Compliant

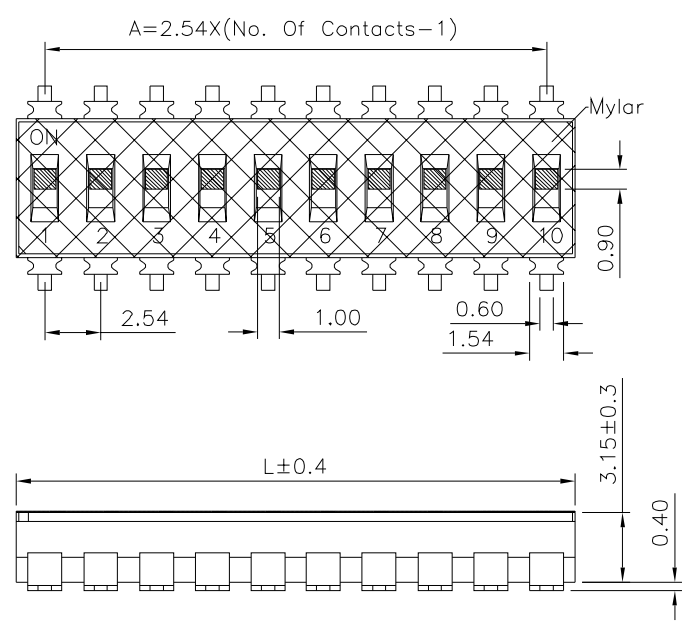

Item	Name	Material	Remark
①	Cover	PPS	Black
②	Autuator	PA6T	White
③	Contact	Phosphor Bronze	Gold Plated Over Nickel
④	Terminal	Brass	Gold Plated Over Nickel
⑤	Base	PPS	Black
⑥	Tape	Kapton	

Schematic	Pin	L	A
1	1	2.54	2.54
2	2	5.08	2.54
3	3	7.62	5.08
4	4	10.16	7.62
5	5	12.70	10.16
6	6	15.24	12.70
7	7	17.78	15.24
8	8	20.32	17.78
9	9	22.86	20.32
10	10	25.40	22.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.30
22376		MEI		
		CHECKED BY HZF		
DRAWING BY LZX		REV. A0		UNIT mm
SCALE	NONE	REV.	A0	UNIT mm

△ A0	NEW RELEASE	HZF	01/18/2022
NO. REV.	REVISIONS	CHK	DATE