File No.	668NA04805	SHEET	1/1

SPECIFICATION
100% Open,Short & Intermitance Test
Conductor Resistance:3 Ohms Max.
Insulation Resistance:10 Megaohms Min./10ms
RoHS Compliant

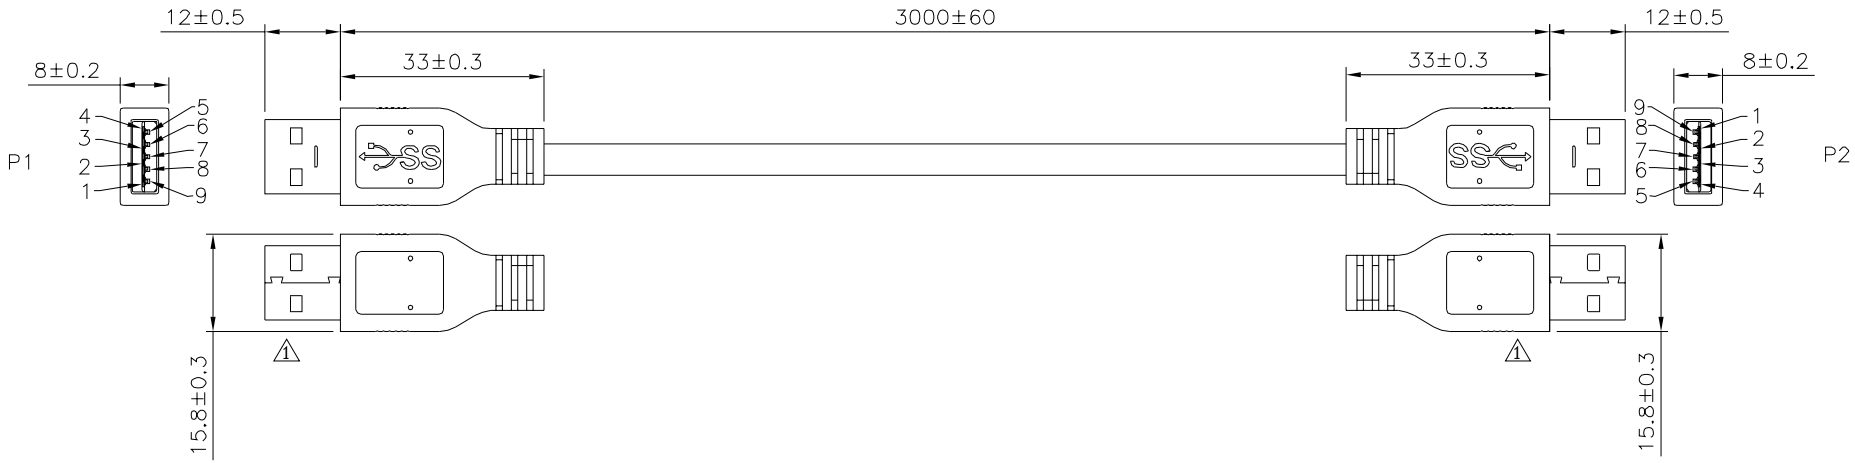

Contacts:

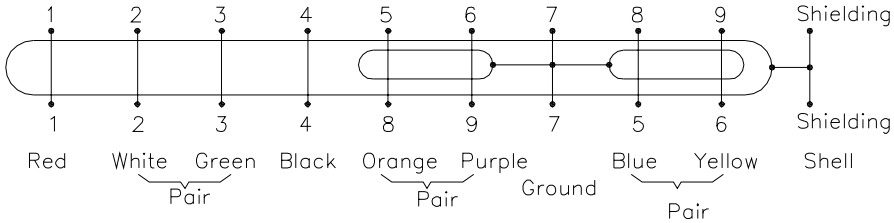

No.	Name	Q'ty	Description
①	Cable	1 PCS	UL2725 AL+B-Foil(28AWG*1P+EAM)*2+(28AWG*1P)+ 24AWG*2C(16*6/0.12AL85%)Black,OD=5.5±0.2mm,PVC Jacket
②	USB 3.0	2 PCS	USB 3.0 A Type Male Solder Wire Molding Type,9Pin,Blue Insulator,Shell:Nickel Plated

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
22382	CHECKED BY HZF	
	DRAWING BY LZX	
SCALE NONE	REV. A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	01/04/2023
0	A0	NEW RELEASE	HZF	08/04/2022