
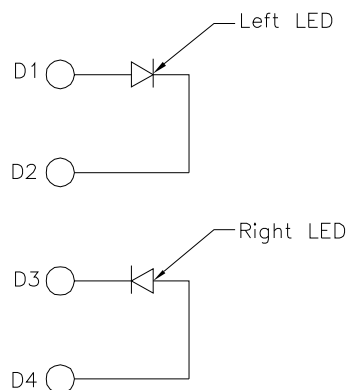


Connector Solder Side

RJ45 Contact Side

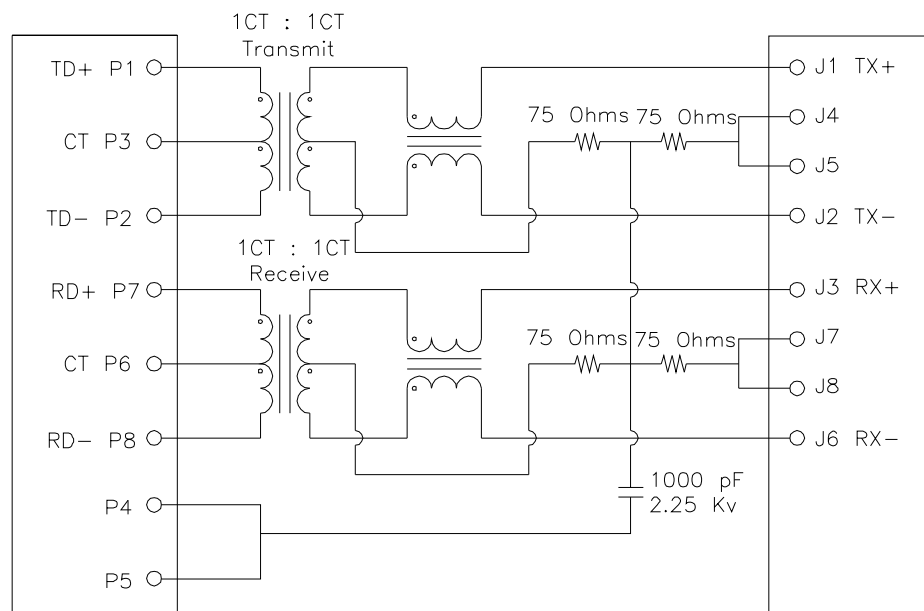

ELECTRICAL SPECIFICATION:

Test Notes:(25±5°C)

- 1.TR:(100KHz,0.1V),Inout To Output=1:1±3%
- 2.LX:(100KHz,100mV,8mA,DC Bias),350uH Min.
- 3.DCR:1.2 Ohms Max.
- 4.Hipot:Input To Output=1500V AC For 60 Seconds
- 5.Insertion Loss:-1.0dB Max. At 0.3MHz To 100MHz
- 6.Return Loss:-20dB Min. At 1MHz To 30MHz
-15dB Min. At 30MHz To 60MHz
-10dB Min. At 60MHz To 80MHz
- 7.Cross Talk:-30dB Min. At 1MHz To 100MHz
- 8.Common To Common Mode Rejection:
-30dB Min. At 1MHz To 100MHz

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22452

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.38
.XX ±0.25
.XXX ±0.10
ANG. ±3°

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

06/16/2022

DATE