

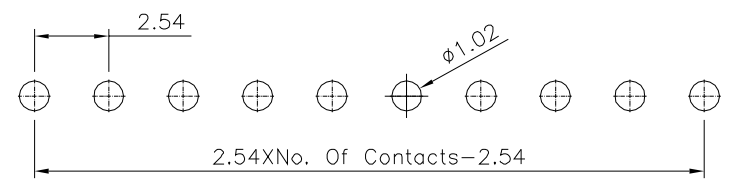
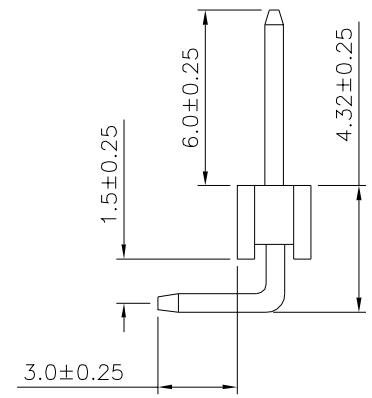


**△ SPECIFICATION**

Current Rating:3 Amp  
 Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Operating Temperature:-40°C~+105°C  
 Housing:PA9T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

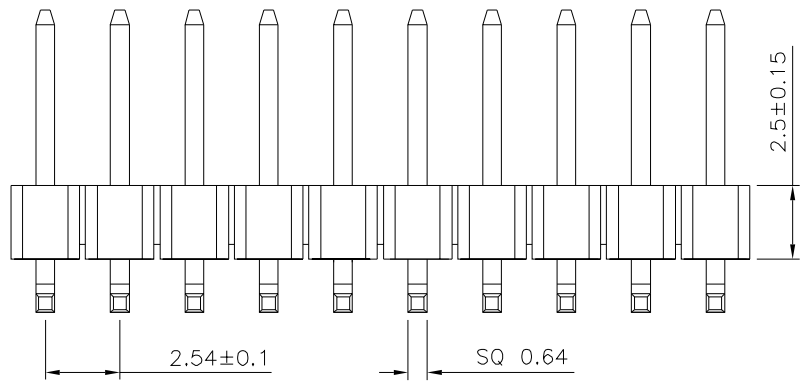

Recommended P.C.B. Layout(Top View)  
 (PCB Board Tolerance $\pm 0.05$ )

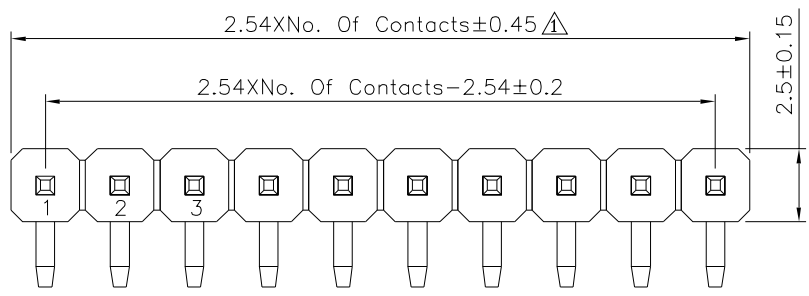

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.25$ X. $\pm 2^{\circ}$ .X $\pm 0.20$ .X $\pm 1.5^{\circ}$ .XX $\pm 0.15$ .XX $\pm 1^{\circ}$ .XXX $\pm 0.10$ .XXX $\pm 0.5^{\circ}$
22503		MEI		
		CHECKED BY		
HZF		CYP		
DRAWING BY		REV.		UNIT
SCALE		NONE		mm
		A2		

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data.	HZF	04/11/2023
△	A1	Modify Data.	HZF	12/19/2016
△	A0	NEW RELEASE	HZF	11/22/2014