

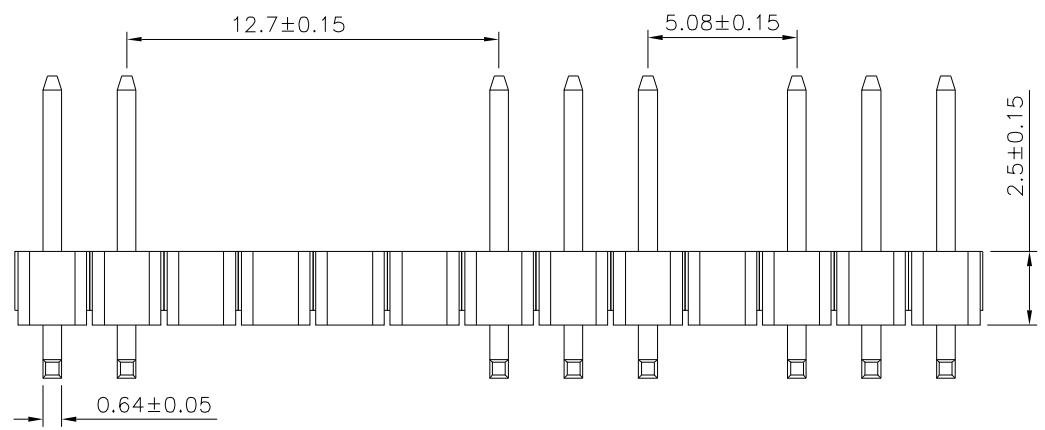


SPECIFICATION
 Current Rating: 3 Amps
 Withstanding Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Housing: PA9T (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

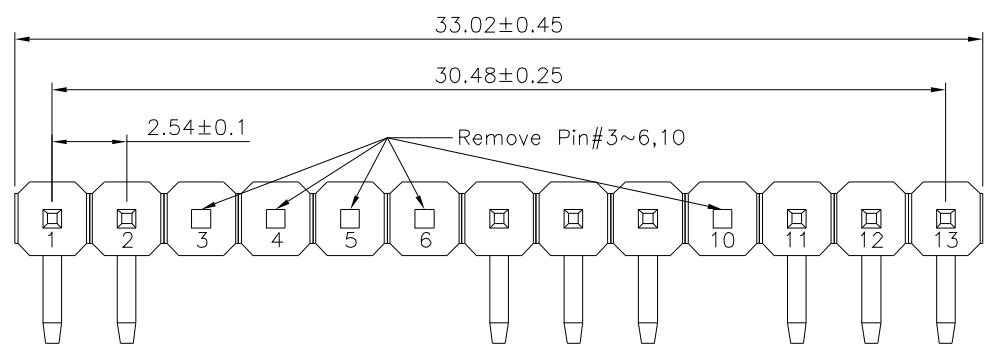

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
22505		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		LZX	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
X.	±0.30	X.*	±2°
.X	±0.25	.X*	±1.5°
.XX	±0.20	.XX*	±1.0°
.XXX	±0.15	.XXX*	±0.5°
NO.	REV.	REVISIONS	DATE
△ A0		NEW RELEASE	04/11/2023
		CHK	