
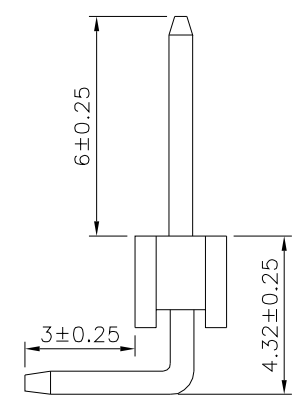
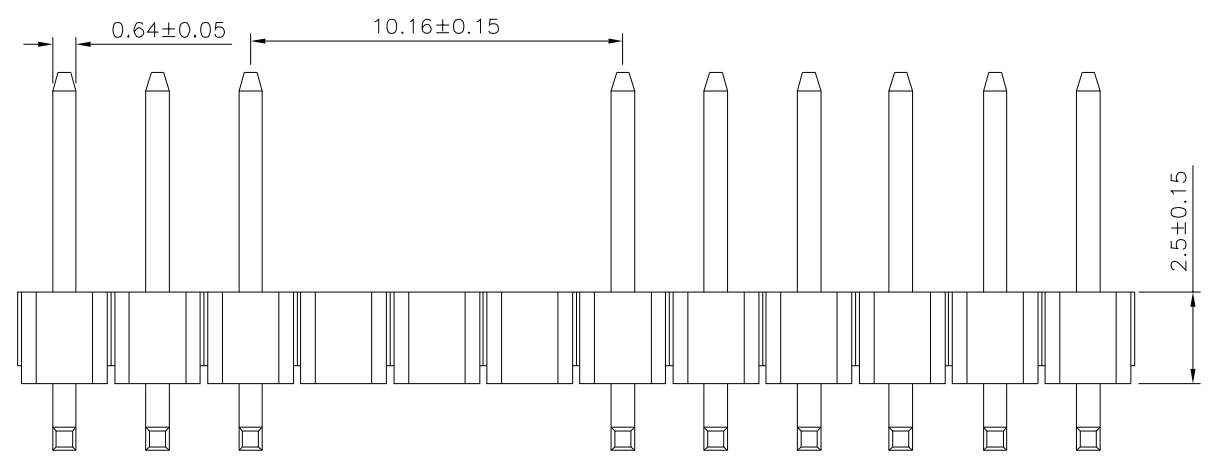


**SPECIFICATION**  
 Current Rating: 3A  
 Withstanding Voltage: 1000V AC Min./Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Insulator: PA9T(UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

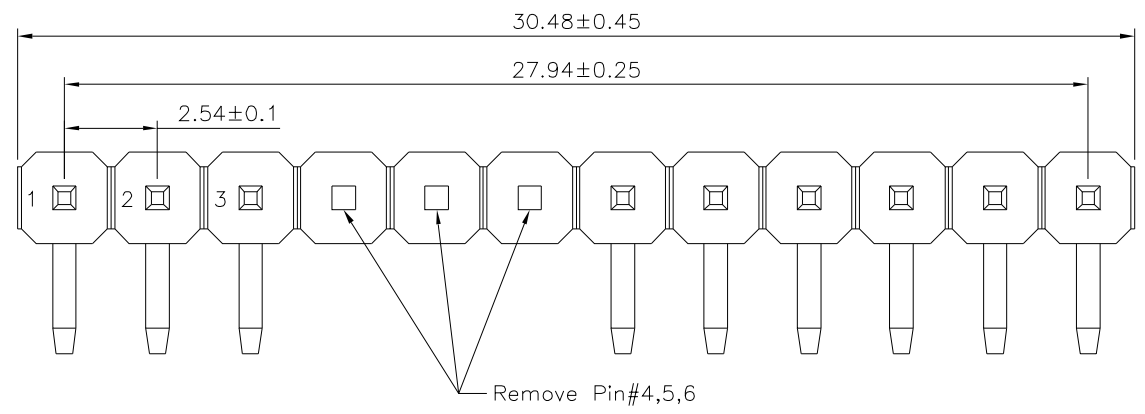

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.30$ X." $\pm 2^{\circ}$ .X $\pm 0.25$ .X" $\pm 1.5^{\circ}$ .XX $\pm 0.20$ .XX" $\pm 1.0^{\circ}$ .XXX $\pm 0.15$ .XXX" $\pm 0.5^{\circ}$
22514		MEI		
		CHECKED BY HZF		
		DRAWING BY LZX		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	04/28/2023
		REVISIONS		