
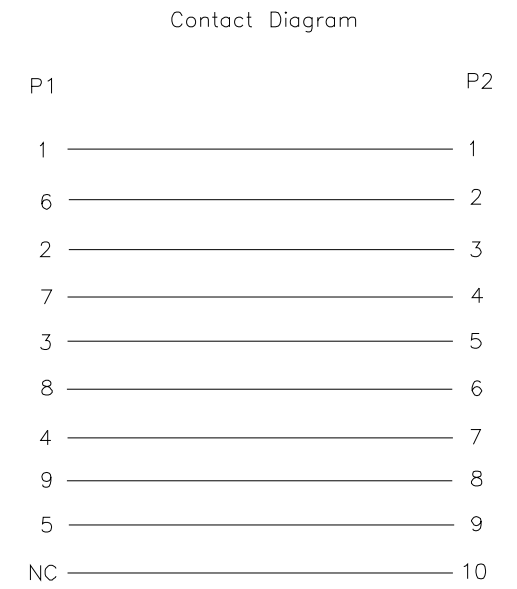


SPECIFICATION
 100% Open Short & Miswire Test.
 Voltage:300V DC
 Insulation Resistance:30 Megaohms Min.
 Contact Resistance:1 Ohms Max.
 RoHS Compliant

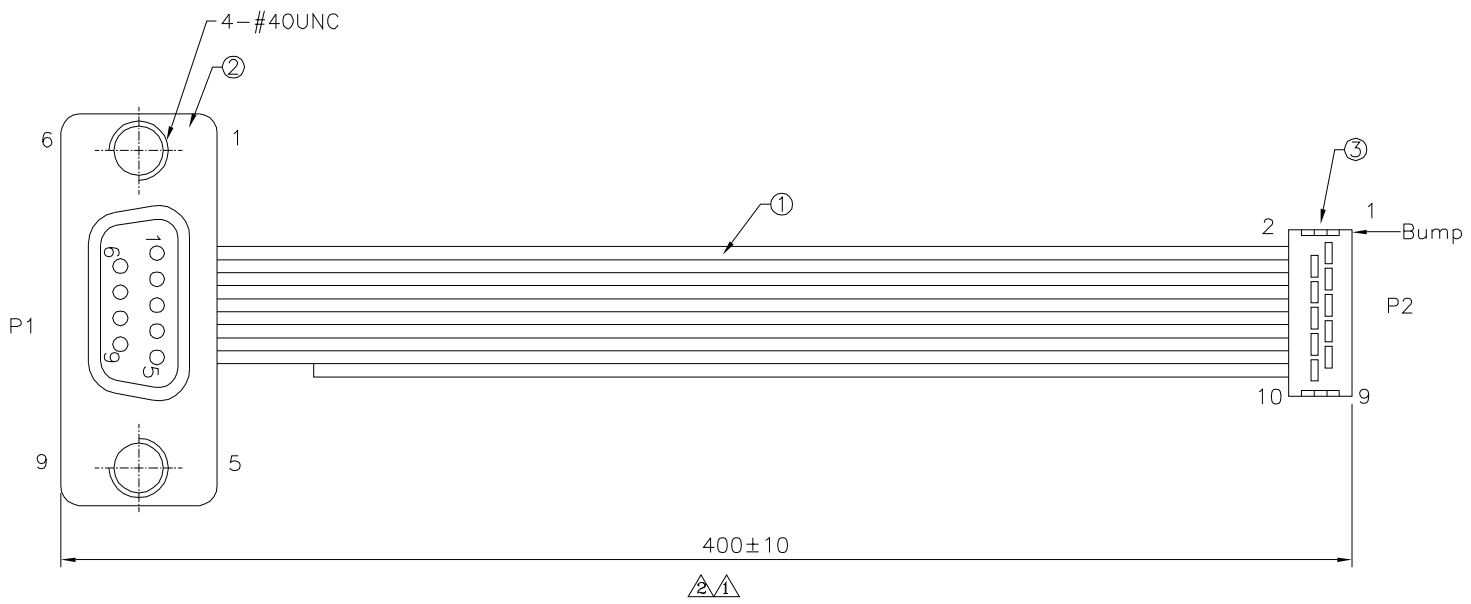

No.	Name	Q'ty	Description
③	IDC	1 PCS	2.54mm Micro Match Box IDC Plug 10Pin,Red Body And Cover
②	D-SUB	1 PCS	D-SUB IDC Type Male 9Pin Blue Insulator,Without S.R.
①	Cable	1 PCS	UL2651 AWG#28*10Ways(7*0.12) PH:1.27 Flat Cable Black

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.				
22565		MEI			△ A2	Modify Data	HZF	09/20/2023
		HZF			△ A1	Modify Data	HZF	08/17/2023
		LZX		△ A0	NEW RELEASE	HZF	08/11/2023	
SCALE	NONE	REV.	A2	UNIT mm	NO.REV.	REVISIONS	CHK	DATE