

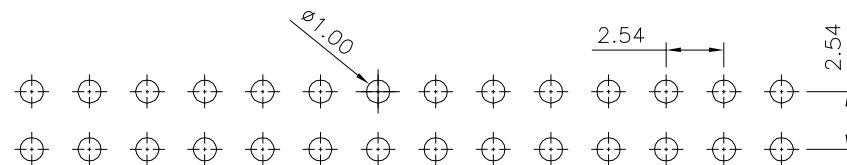


SPECIFICATION

Current Rating: 3 Amp/Contact Max.
 Operation Voltage: 60V AC/DC
 Contact Resistance: 4 Milliohms/Contacts Max.
 Insulation Resistance: 1000 Megaohms Min. At 100V
 ⚠ Withstanding Voltage: 500V AC/Minute
 Housing: PPS(UL94V-0), Black
 Pin(Out Sleeve): Brass, Tin Plated Over Nickel
 Clip(Contact 6 Finger): Beryllium Copper
 Gold Flash Over Nickel
 Durability: 200 Cycles Min.
 ⚠ Average Insertion Force With Steel
 Pin Of $\varnothing 0.66\text{mm}$: <250g
 Average Withdrawal Force With Steel
 Pin Of $\varnothing 0.66\text{mm}$: >25g Min.
 Operation Temperature: Gold Plated: -55°C To +105°C
 Tin Plated: -40°C To +105°C
 RoHS Compliant

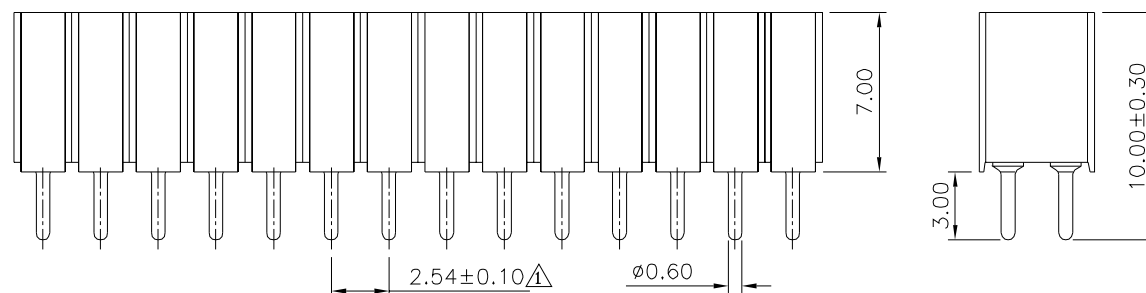

Recommended P.C.B. Layout
 ⚠ Tolerance ± 0.05

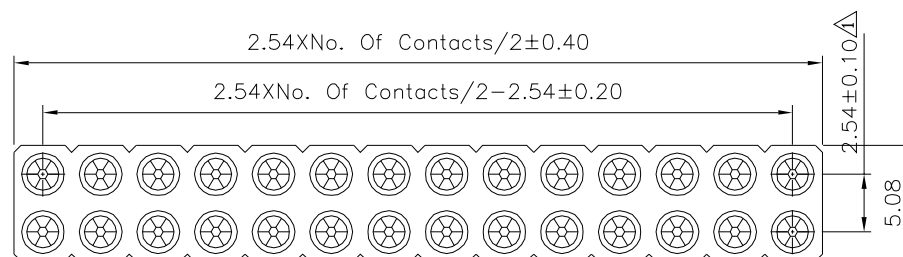

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22602

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

SCALE

NONE

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG. $\pm 5^\circ$

UNIT
 mm



NO. REV.

A1

Modify Data

NO. REV.

A0

NEW RELEASE

REVISIONS

CHK

DATE

0