
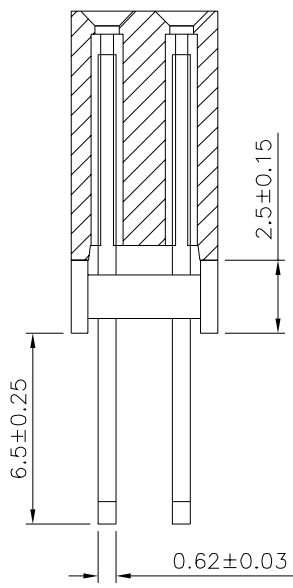
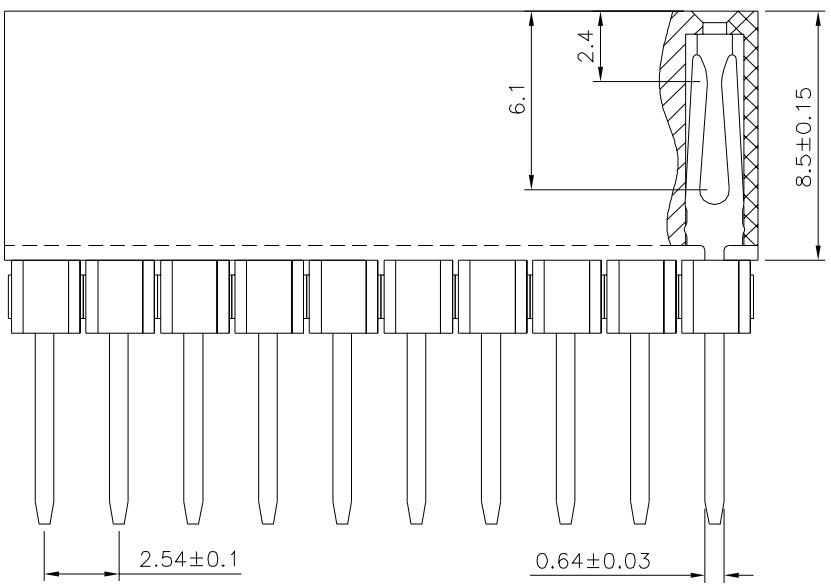


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

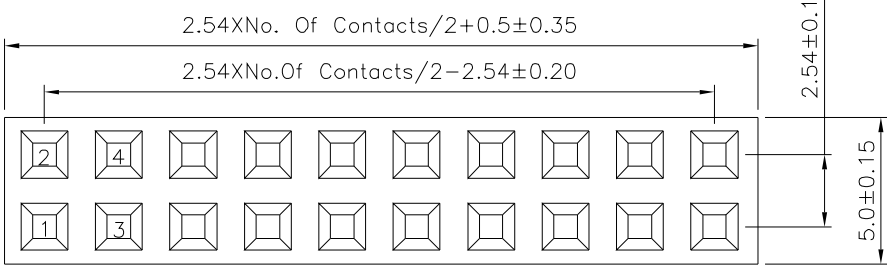

SPECIFICATION
 Current Rating:3A
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
22616


APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 LZX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.30 X.* ±2°
 .X ±0.25 .X* ±1.5°
 .XX ±0.20 .XX* ±1.0°
 .XXX ±0.15 .XXX* ±0.5°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	07/09/2023

SCALE NONE

REV. A0



NO. REV. REVISIONS CHK DATE