
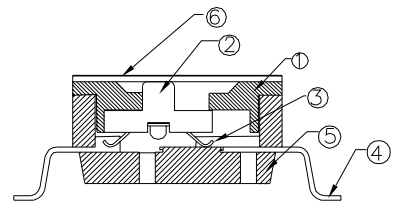
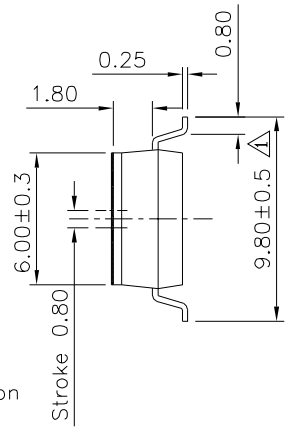


**△ SPECIFICATION**  
 Current Rating: Non-Switching: DC 50V 100mA  
 Switching: DC 24V 25mA  
 Contact Resistance: 100 Milliohms Max.  
 Insulation Resistance: 100 Megaohms Min.  
 Withstand Voltage: 500V AC (50Hz Or 60Hz) Shall Be Applied Between Terminals And Between Individual Terminals And Frame For One Minute  
 Operation Temperature: -20°C ~ +85°C  
 RoHS Compliant

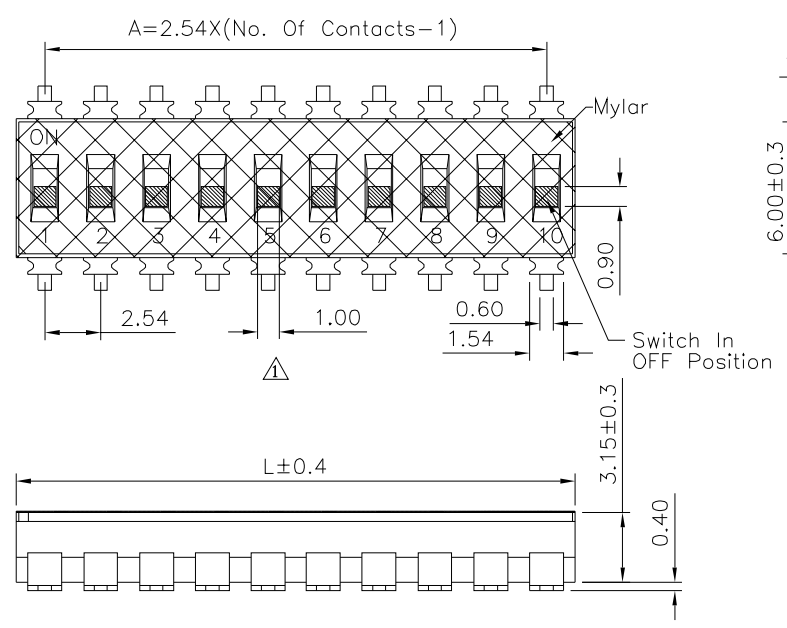

Item	Name	Material	Remark
①	Cover	PPS	Black
②	Autuator	LCP	White
③	Contact	Phosphor Bronze	Gold Plated Over Nickel
④	Terminal	Brass	Gold Plated Over Nickel
⑤	Base	PPS	Black
⑥	Tape	Kapton	_____

Schematic	Pin	L	A
1	1	2.54	2.54
2	2	5.08	5.08
3	3	7.62	7.62
4	4	10.16	10.16
5	5	12.70	12.70
6	6	15.24	15.24
7	7	17.78	17.78
8	8	20.32	20.32
9	9	22.86	22.86
10	10	25.40	25.40

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 22651

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY LZX  
 SCALE NONE REV. A1  
 UNIT mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .XX ±0.2 .XX\* ±2.0°

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	07/09/2024
△ A0		NEW RELEASE	HZF	01/18/2022