

SPECIFICATION

1.Material&Finish

Housing:LCP(UL94V-0)
 Contact:Phosphor Bronze,Gold Flash On Contact Area,
 Gold Flash On Solder Tails,Over Nickel
 Shell:Stainless Steel,Gold Flash On Solder Tails
 Over Nickel




2.Electrical Characteristics

Current Rating:0.5A
 Voltage Rating:5V
 Contact Resistance:100 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.


3.Mechanical Characteristics

Durability:3000 Cycles Min.

4.RoHS Compliant

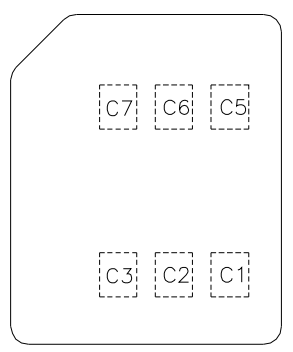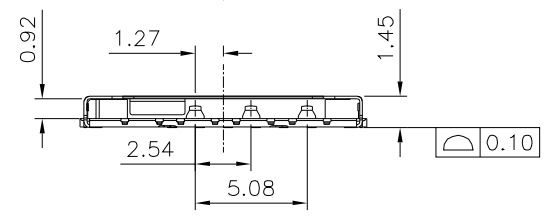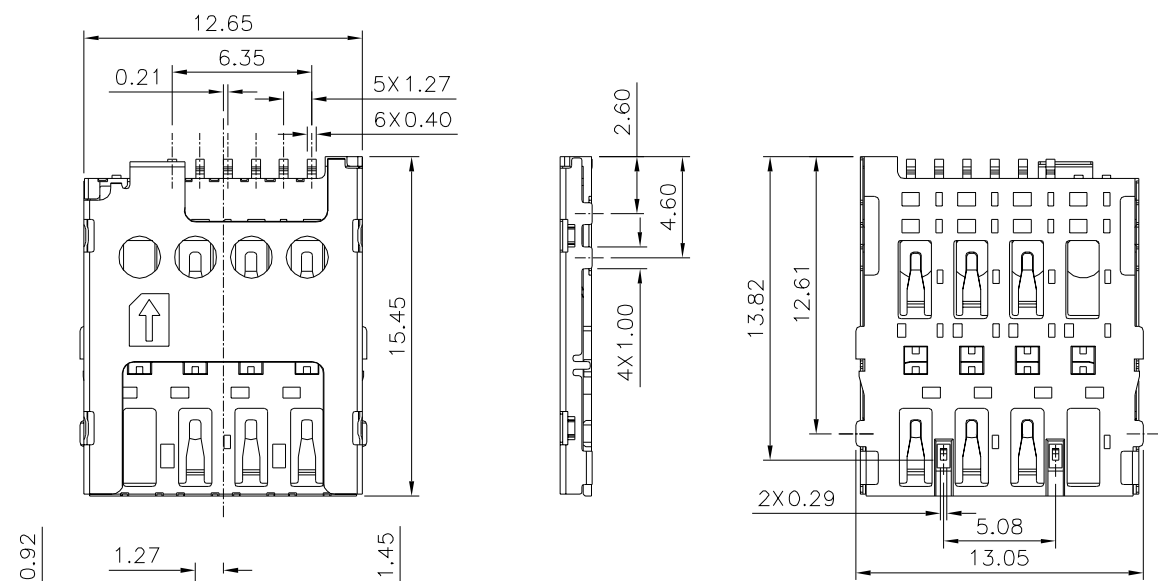


Micro SIM

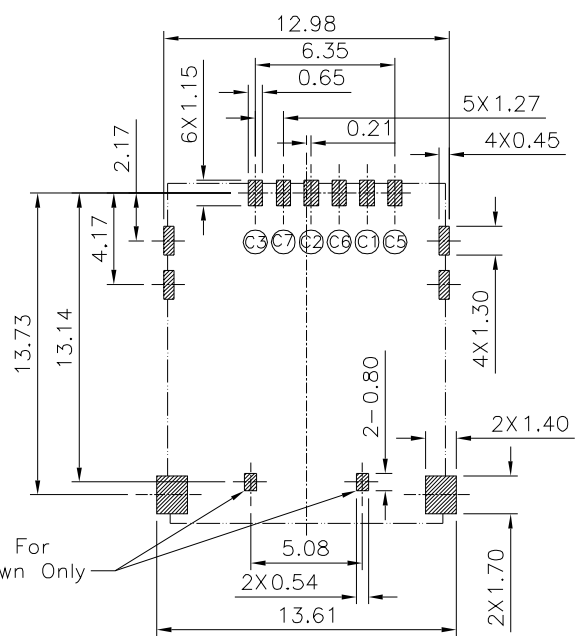

Recommended P.C.B. Layout
 (PCB Board Tolerance:±0.05)

Not GND For
 Hold-Down Only

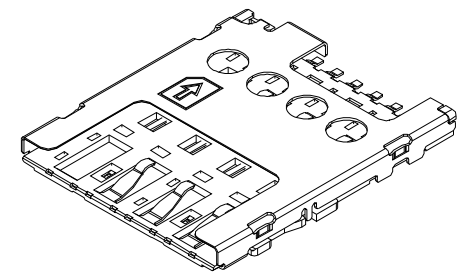

Pin No.	Name
C8	Reserved
C7	I/O
C6	VPP
C5	GND
C4	Reserved
C3	CLK
C2	RST
C1	VCC

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
22678		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		LZX	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.45 X.* ±5°
 .X ±0.35 .X* ±2°
 .XX ±0.25 .XX* ±1°
 .XXX ±0.15 .XXX* ±0.5°

UNIT	mm	NO.	REV.	AO	NEW RELEASE	HZF	12/20/2021
					REVISIONS	CHK	DATE