

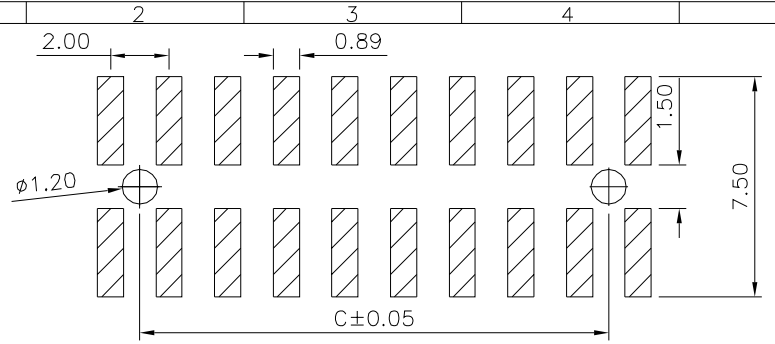
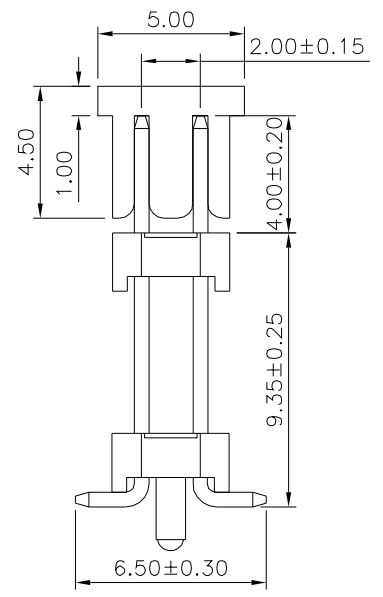


**SPECIFICATION**

Current Rating:2A  
 Dielectric Withstand:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Housing:PA6T+30%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

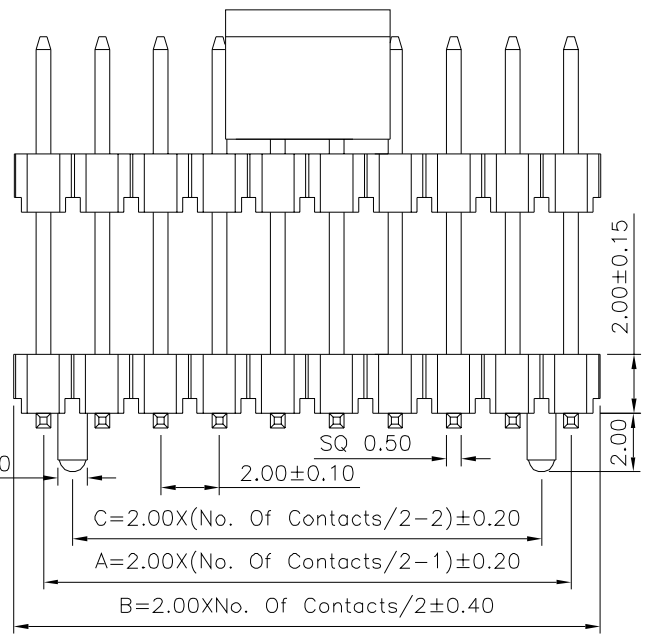

Recommended P.C.B. Layout  
 Tolerance:±0.05

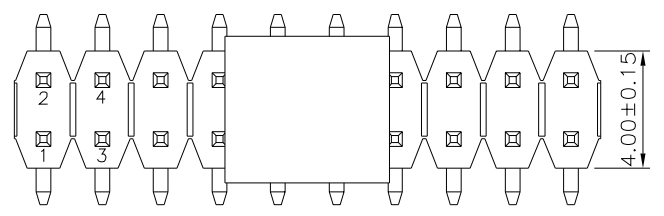

Pin	A	B	C	Pin	A	B	C
06	4.00	6.00	2.00	44	42.00	44.00	40.00
08	6.00	8.00	4.00	46	44.00	46.00	42.00
10	8.00	10.00	6.00	48	46.00	48.00	44.00
12	10.00	12.00	8.00	50	48.00	50.00	46.00
14	12.00	14.00	10.00	52	50.00	52.00	48.00
16	14.00	16.00	12.00	54	52.00	54.00	50.00
18	16.00	18.00	14.00	56	54.00	56.00	52.00
20	18.00	20.00	16.00	58	56.00	58.00	54.00
22	20.00	22.00	18.00	60	58.00	60.00	56.00
24	22.00	24.00	20.00	62	60.00	62.00	58.00
26	24.00	26.00	22.00	64	62.00	64.00	60.00
28	26.00	28.00	24.00	66	64.00	66.00	62.00
30	28.00	30.00	26.00	68	66.00	68.00	64.00
32	30.00	32.00	28.00	70	68.00	70.00	66.00
34	32.00	34.00	30.00	72	70.00	72.00	68.00
36	34.00	36.00	32.00	74	72.00	74.00	70.00
38	36.00	38.00	34.00	76	74.00	76.00	72.00
40	38.00	40.00	36.00	78	76.00	78.00	74.00
42	40.00	42.00	38.00	80	78.00	80.00	76.00

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 22692

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY LSM

SCALE NONE REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 ANG.

UNIT mm

AO	NEW RELEASE	HZF	06/22/2024
NO. REV.	REVISIONS	CHK	DATE