

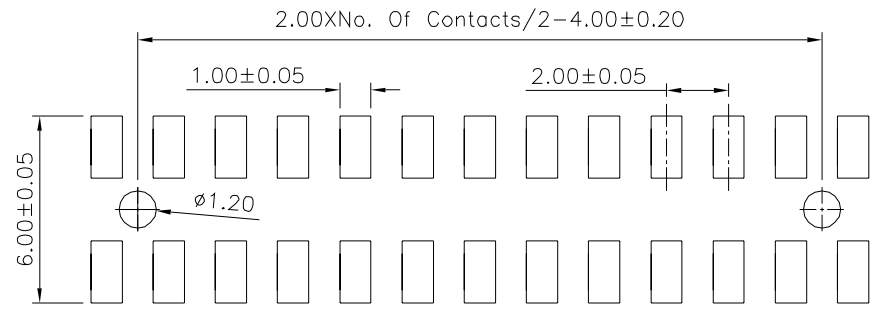
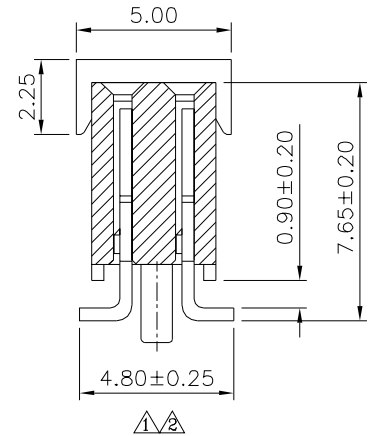


SPECIFICATION
 ⚠️ Current Rating:2A
 Dielectric Withstand:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

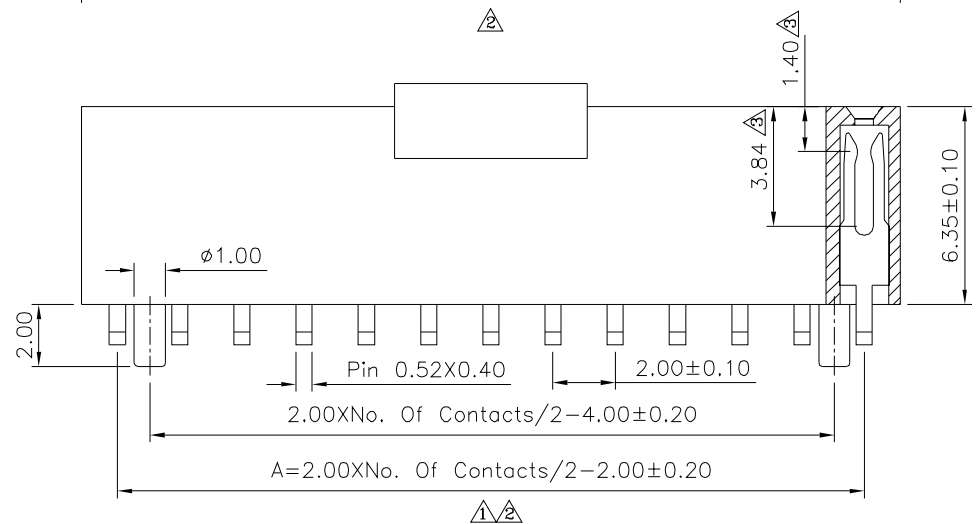

Recommended P.C.B. Layout

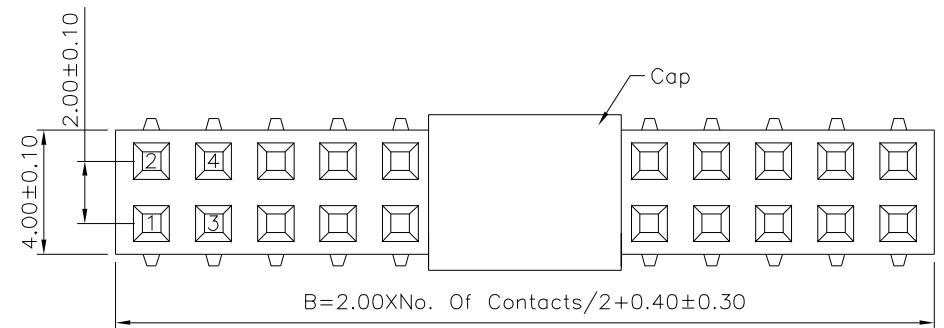

| Pin | A | B | Pin | A | B |
|-----|-------|-------|-----|-------|-------|
| 6 | 4.00 | 6.40 | 44 | 42.00 | 44.40 |
| 8 | 6.00 | 8.40 | 46 | 44.00 | 46.40 |
| 10 | 8.00 | 10.40 | 48 | 46.00 | 48.40 |
| 12 | 10.00 | 12.40 | 50 | 48.00 | 50.40 |
| 14 | 12.00 | 14.40 | 52 | 50.00 | 52.40 |
| 16 | 14.00 | 16.40 | 54 | 52.00 | 54.40 |
| 18 | 16.00 | 18.40 | 56 | 54.00 | 56.40 |
| 20 | 18.00 | 20.40 | 58 | 56.00 | 58.40 |
| 22 | 20.00 | 22.40 | 60 | 58.00 | 60.40 |
| 24 | 22.00 | 24.40 | 62 | 60.00 | 62.40 |
| 26 | 24.00 | 26.40 | 64 | 62.00 | 64.40 |
| 28 | 26.00 | 28.40 | 66 | 64.00 | 66.40 |
| 30 | 28.00 | 30.40 | 68 | 66.00 | 68.40 |
| 32 | 30.00 | 32.40 | 70 | 68.00 | 70.40 |
| 34 | 32.00 | 34.40 | 72 | 70.00 | 72.40 |
| 36 | 34.00 | 36.40 | 74 | 72.00 | 74.40 |
| 38 | 36.00 | 38.40 | 76 | 74.00 | 76.40 |
| 40 | 38.00 | 40.40 | 78 | 76.00 | 78.40 |
| 42 | 40.00 | 42.40 | 80 | 78.00 | 80.40 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 |
| 22693 | | EMILY | | |
| | | CHECKED BY | | |
| | | HZF | | |
| DRAWING BY | | HAO | | |
| SCALE | NONE | REV. | A3 | UNIT mm |

| NO. | REV. | REVISIONS | CHK | DATE |
|-------|------|-------------|-----|------------|
| ⚠️ A3 | | Modify Data | HZF | 06/22/2024 |
| ⚠️ A2 | | Modify Data | HZF | 08/11/2015 |
| ⚠️ A1 | | Modify Data | HZF | 03/28/2015 |
| ⚠️ A0 | | NEW RELEASE | HZF | 10/01/2013 |