

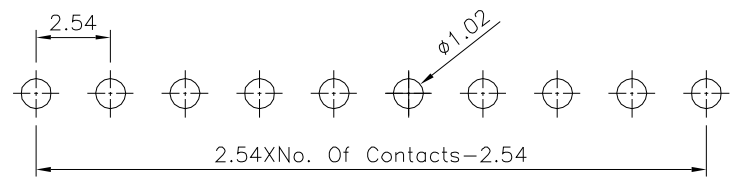
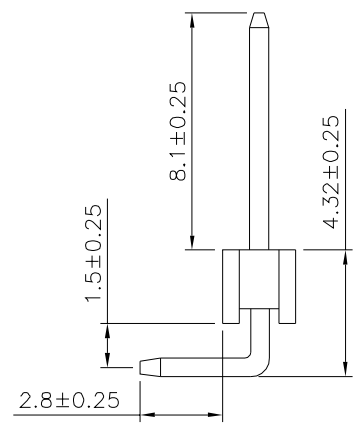


SPECIFICATION
 Current Rating: 3A
 Withstanding Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Housing: PA9T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

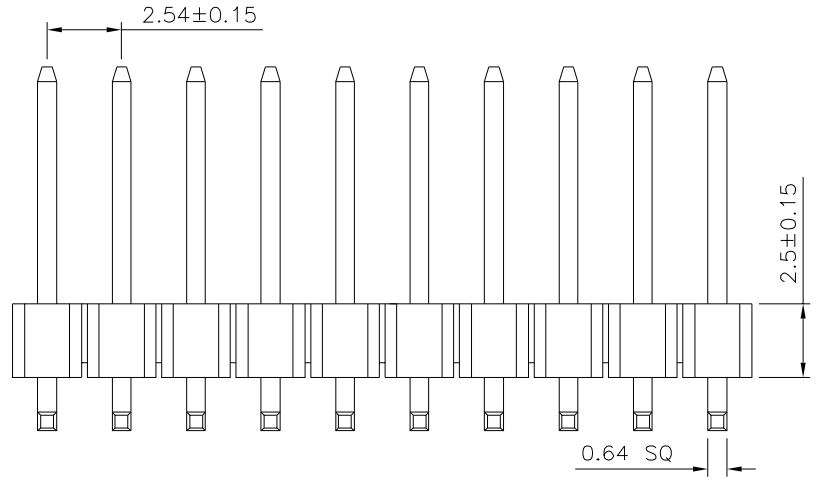

Recommended P.C.B. Board Layout
 PCB Tolerance: ± 0.05 (Top View)

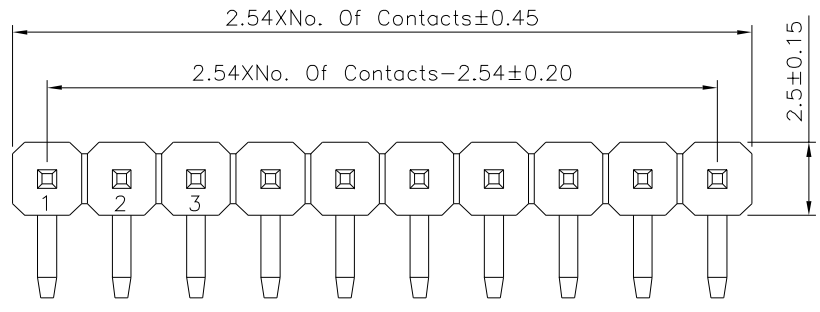

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X.* $\pm 2^*$.XX ± 0.20 .X* $\pm 1.5^*$.XX ± 0.15 .XX* $\pm 1^*$.XXX ± 0.10 .XXX* $\pm 0.5^*$
22710		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		LSM		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	06/27/2024