
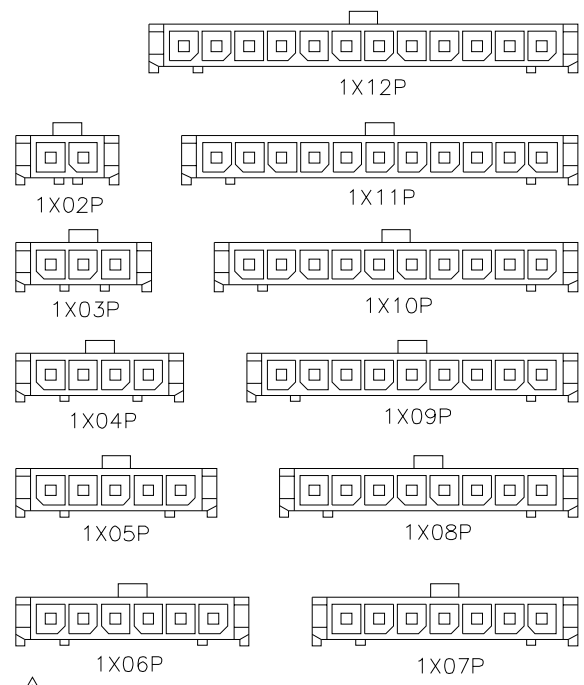
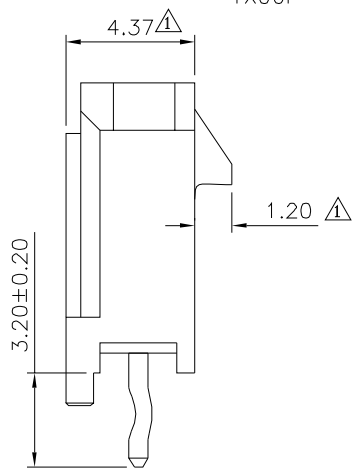
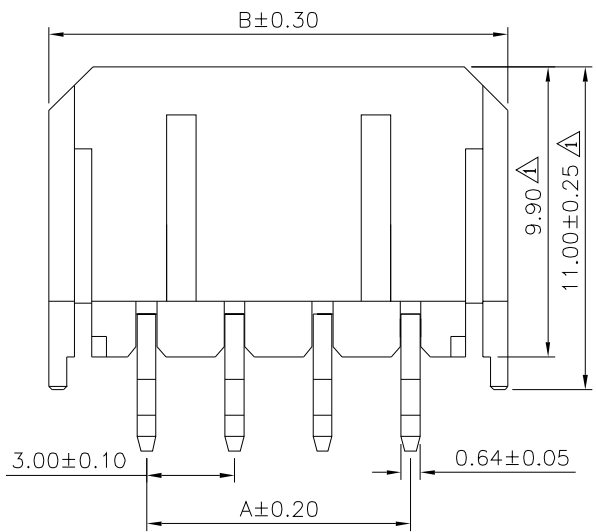


Recommended P.C.B. Layout

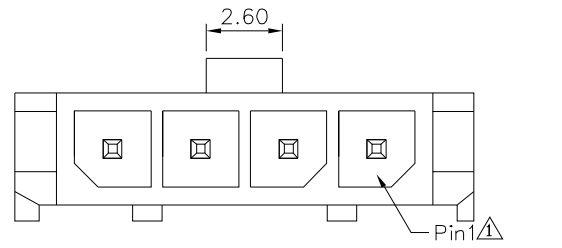

△ SPECIFICATION

- 1. Material & Finish
Insulator: LCP (UL94V-0), Black
Contact: Brass, Tin Plated
- 2. Electrical Characteristics
Current Rating: 5A AC, DC
Voltage Rating: 250V AC, DC
Withstanding Voltage: 1500V AC/Minute
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
- 3. Environmental Characteristics
Temperature Range: -40°C ~ +105°C
- 4. RoHS Compliant

Pin	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X ±0.25 XX ±0.20 XXX ±0.05 ANG. ±1°
22719		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A1	UNIT mm

△ A1	Modify Data	HZF	01/24/2024
△ A0	NEW RELEASE	HZF	11/04/2016
NO. REV.	REVISIONS	CHK	DATE