

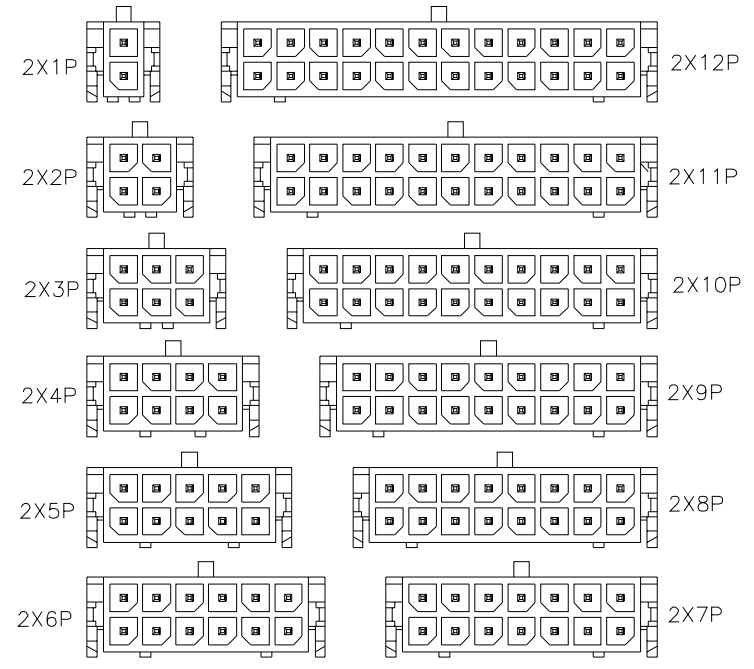
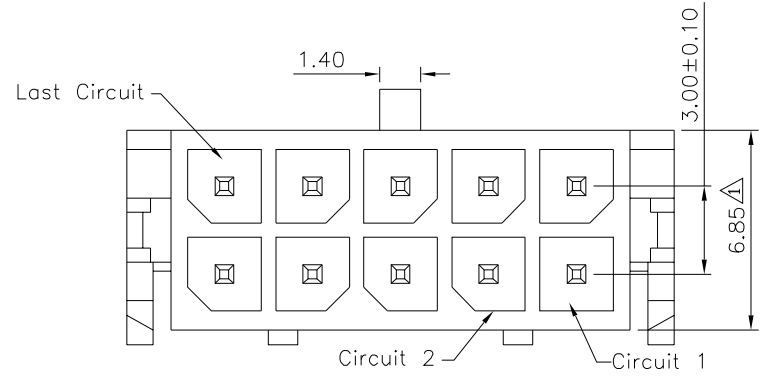


△ Recommended P.C.B. Layout

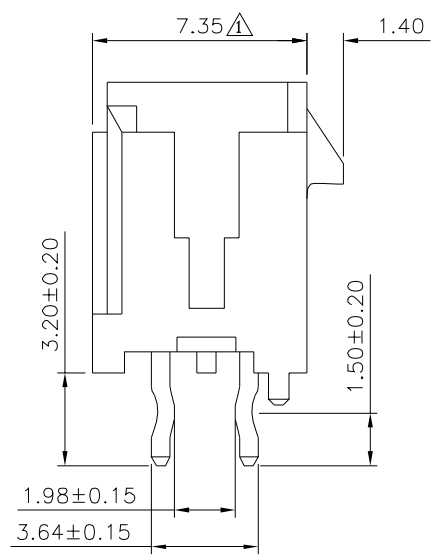

△ SPECIFICATION

1. Material & Finish  
 Insulator: LCP (UL94V-0), Black  
 Contact: Brass, Tin Plated
2. Electrical Characteristics  
 Current Rating: 5A AC, DC  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 1500V AC/Minute  
 Insulation Resistance: 1000 Megaohms Min.  
 Contact Resistance: 20 Milliohms Max.
3. Environmental Characteristics  
 Temperature Range: -40°C ~ +105°C
4. RoHS Compliant

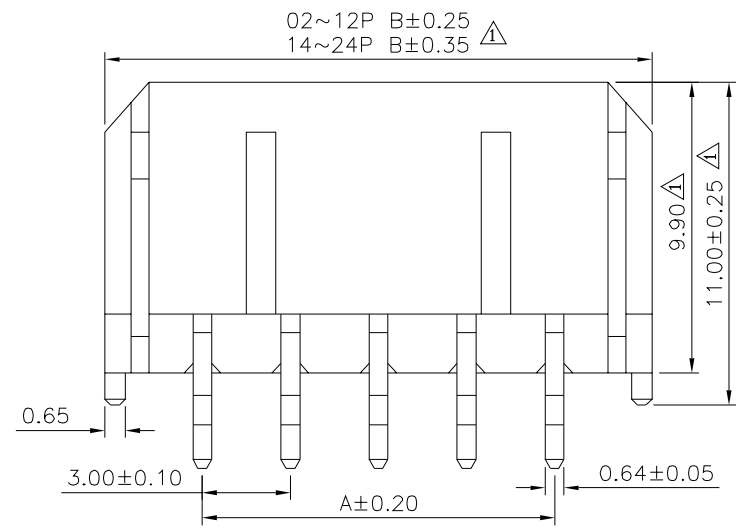

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X ±0.25 XX ±0.20 XXX ±0.05 ANG. ±1°
22731		MEI		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A1	UNIT mm

△ A1	Modify Data	HZF	06/03/2020
△ A0	NEW RELEASE	HZF	11/04/2016
NO. REV.	REVISIONS	CHK	DATE