


File No.	689PC11802	SHEET	1/1

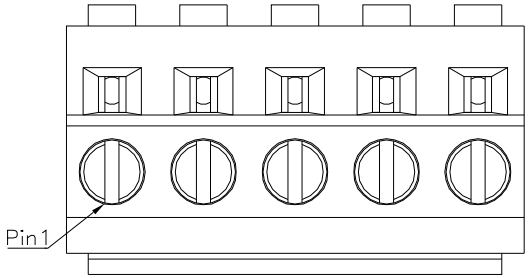

⚠1 SPECIFICATION

Current Rating: 10A/Way Max.
Voltage Rating: 300V AC
Withstanding Voltage: 2500V AC/Minute
Contact Resistance: 20 Milliohms Max.
Wire Range: 14~26AWG
Torque: 4.0 kgf.cm/M2.5
Operating Temperature: −40℃~+105℃
Contact:Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
⚠2 Insulator:Polyamide(UL94V−0),Black
RoHS Compliant

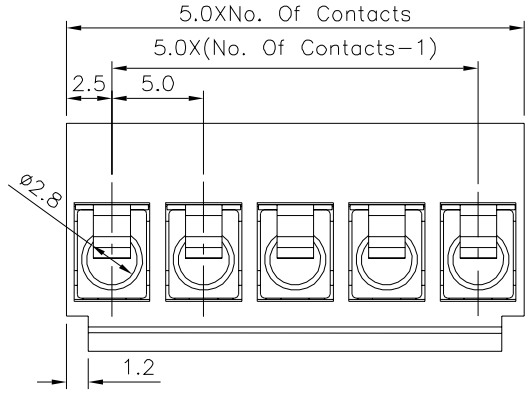

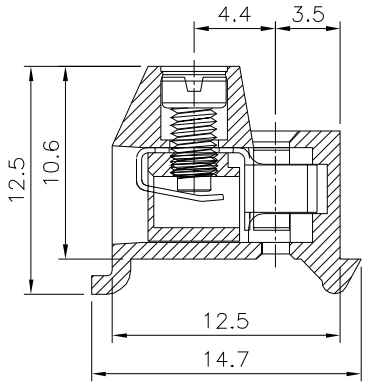

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. ⚠2		APPROVED BY	MEI
22747		CHECKED BY	HZF
		DRAWING BY	CYP
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠2	A2	Modify Data	HZF	03/11/2025
⚠1	A1	Modify Data	HZF	09/02/2024
⚠0	A0	NEW RELEASE	HZF	02/21/2018